


## Notes:

1. Functional fittings contained within this schedule are for design intent information only. Final fitting specifications, quantities, and lighting calculations are to be determined in Stage 4 by the appointed lighting consultant.
2. All decorative fittings such as pendants and wall lights are *not* to be substituted for alternative fittings.
3. Final specifications developed during Stage 4 are to be presented to the Client and SHH Architects for review and approval prior to proceeding with Tender.

| Ref Code | Description                              |
|----------|--|
| L01      | Double Recessed Downlight                |
| L02      | Single Recessed Downlight                |
| L03      | Recessed Directional Downlight           |
| L04      | Surface Mounted Wall Light               |
| L05      | Flexible LED Linear Strip (Visible)      |
| L06(A)   | Recessed Track Light                     |
| L06(B)   | Recessed Track Light                     |
| L07      | Bespoke LED Fitting                      |
| L08      | Modular Light Fitting                    |
| L09      | Single Recessed Downlight                |
| L10      | Flexible LED Linear Strip (Concealed)    |
| L11      | Pendant Light                            |
| L12      | Surface Mounted Downlight                |
| L13      | Surface Mounted Wall Light               |
| L14      | Track Lighting                           |
| L15      | Double Recessed Adjustable Downlight     |
| L16      | Modular Luminaire                        |
| L17      | IP65 Downlight                           |
| L18      | Plaster-in LED Strip                     |
| L19      | Surface Mounted Light                    |
| L20      | Wall Light                               |
| L21      | Pendant Light                            |
| L22      | Suspended Light                          |
| L23      | Decorative Pendant                       |
| L24      | Decorative Pendant                       |
| L25      | Decorative Pendant                       |
| L26      | Floor Lamp (South Reception East Lounge) |
| L27      | Table Lamp                               |
| L28      | Illuminated Escape Sign                  |
| L29      | Illuminated Escape Sign                  |
| L30      | Illuminated Escape Sign                  |
|          |  |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |                           |
|-------------------|---------------------------|
| Reference Code:   | <b>L01</b>                |
| Item Description: | Double Recessed Downlight |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

Product Name: ORLIR2MFX  
 Code:  
 Colour: All White  
 Finish:  
 Dimensions:  
 Colour Temp: 3000K  
 Notes:

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|




ORLIR2MFX - Thin Twin Trim Round Magnetic Fixture




Description

This round thin twin trim downlight features round minimalistic design with 'thin trim' bezel to appear almost trimless in-situ. This round minimalist fixture does not compromise on technical performance with magnetic lamp change facility. An anti-glare baffle functions to enhance visual comfort.


Dimensions

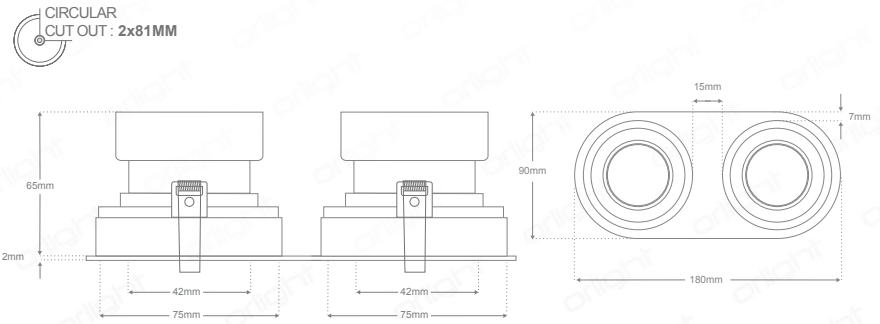

Dimensions w/Lamp: LUMENSTAR 3 ; LUMENPLUS 3

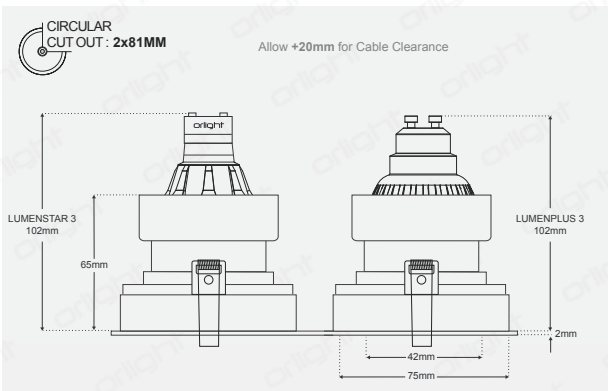


Dimensions w/Engine: DB-R999 Range

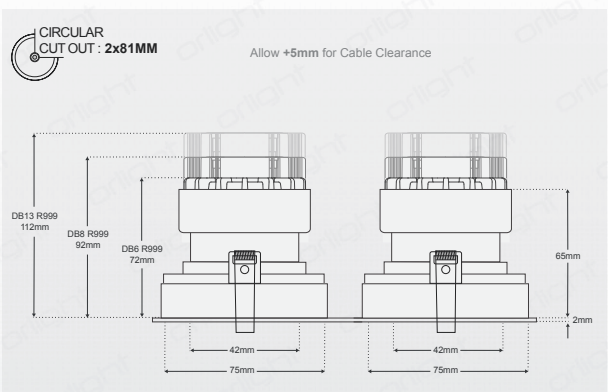

Specifications

|                   |   |
|-------------------|---|
| Lamps             | LUMENPLUS 3 ; LUMENSTAR 3 ; DB-R999 Range |
| Construction      | Aluminium Frame / Magnetic Ring           |
| Lamp Change       | Magnetic Lamp Change Mechanism            |
| Power Consumption | Variable Light Source                     |
| Voltage           | Max. 240V                                 |
| Tilt              | -   |
| Rotation          | 360°                                      |
| Cutout            | 2x81mm - Circular                         |
| Anti-Glare        | Yes                                       |
| IP Rating         | IP20                                      |
| Accessories       | GU10 Lamp Holder (MC2)                    |
| Finish            | Epoxy Powder Coat                         |

Finishes

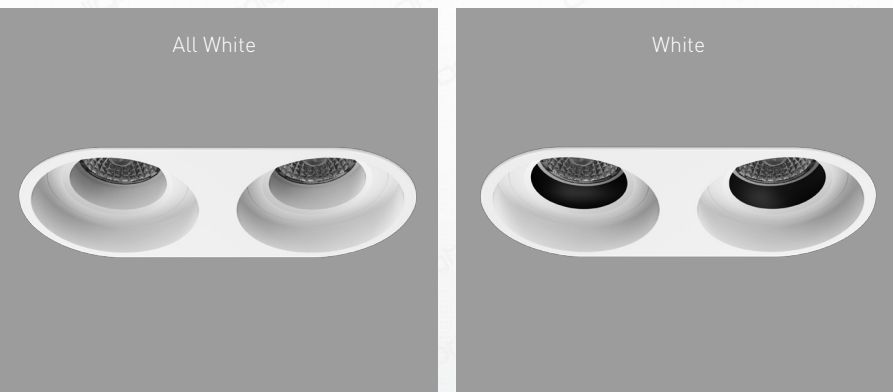

Product Coding: Example: ORLIR2MFX-WH

PREFIX

CODE

FINISH

LAMP HOLDER


ORL

IR2MFX

WH

GU10

AW

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                           |
|-------------------|---------------------------|
| Reference Code:   | <b>L02</b>                |
| Item Description: | Single Recessed Downlight |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

Product Name: ORLIR1MFX  
 Code:  
 Colour: All White  
 Finish:  
 Dimensions:  
 Colour Temp: 3000K  
 Notes:

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice



MEMBER






ORLIR1MFX - Thin Trim Round Magnetic Fixture


Description

Architectural fixed downlight featuring an anti-glare baffle and magnetic lamp change mechanism. Discreet application due to minimal trim bezel designed to appear trimless in-situ.


Dimensions

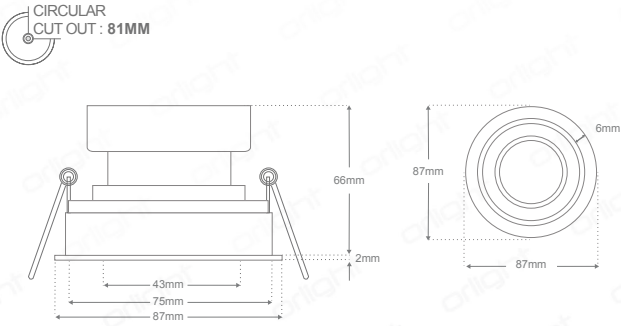

Dimensions w/Lamp: LUMENSTAR 3 ; LUMENPLUS 3

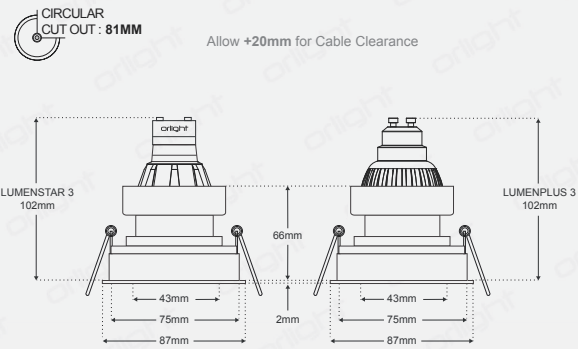

Dimensions w/Engine: DB-R999 Range

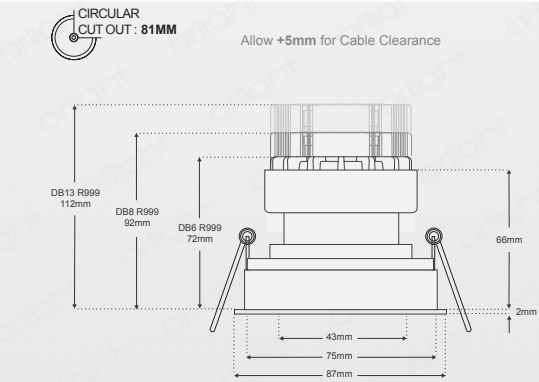

Specifications

|                   |   |
|-------------------|---|
| Lamps             | LUMENPLUS 3 ; LUMENSTAR 3 ; DB-R999 Range |
| Construction      | Aluminium Frame / Magnetic Ring           |
| Lamp Change       | Magnetic Lamp Change Mechanism            |
| Power Consumption | Variable Light Source                     |
| Voltage           | Max. 240V                                 |
| Rotation          | 360°                                      |
| Cutout            | 81mm - Circular                           |
| Anti-Glare        | Yes                                       |
| IP Rating         | IP20                                      |
| Accessories       | GU10 Lamp Holder (MC2)                    |
| Finish            | Epoxy Powder Coat                         |

Finishes



Product Coding: Example: ORLIR1MFX-WH

PREFIX

CODE

FINISH

LAMP HOLDER


ORL

IR1MFX

WH

GU10

AW

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                                |
|-------------------|--------------------------------|
| Reference Code:   | <b>L03</b>                     |
| Item Description: | Recessed Directional Downlight |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

Product Name: ORLIR1M  
 Code:  
 Colour: All White  
 Finish:  
 Dimensions:  
 Colour Temp: 3000K  
 Notes:

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice



MEMBER




## ORLIR1M - Thin Trim Round Magnetic Fixture




### Description

Architectural downlight featuring an anti-glare baffle and magnetic lamp change mechanism. Discreet application due to minimal trim bezel designed to appear trimless in-situ. 360 Degree rotation and tilt capability.


### Dimensions

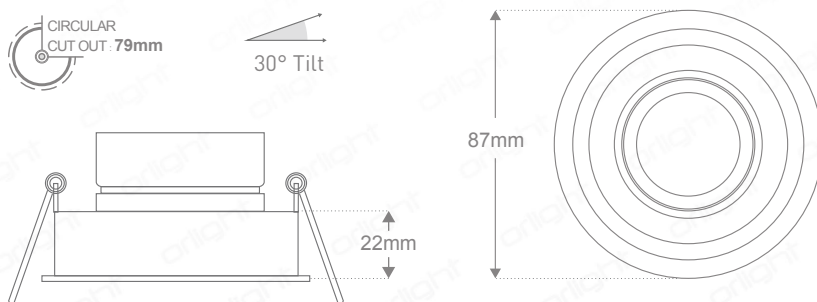

### Dimensions w/Lamp: CR-5 - LUMENSTAR- MTG2PLUS

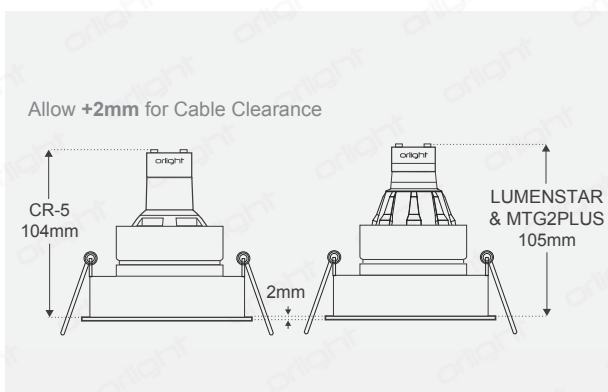


### Dimensions w/Lamp: R9-99 Range

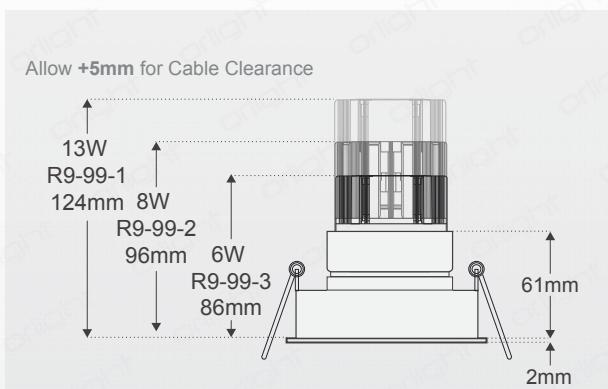

### Specifications


|                   |   |
|-------------------|---|
| Lamps             | CR5; LUMENSTAR; MTG2PLUS; DIABLO Range; R9-99 Range |
| Construction      | Aluminium Frame / Magnetic Ring                     |
| Lamp Change       | Magnetic Lamp Change Mechanism                      |
| Power Consumption | Variable Light Source                               |
| Voltage           | Max. 240V   |
| Tilt              | 30°   |
| Rotation          | 360°  |
| Cutout            | 79mm - Circular                                     |
| Anti-Glare        | Yes   |
| IP Rating         | IP20  |
| Accessories       | GU10 Lamp Holder (MC2)                              |
| Finish            | Epoxy Powder Coat                                   |

### Finishes

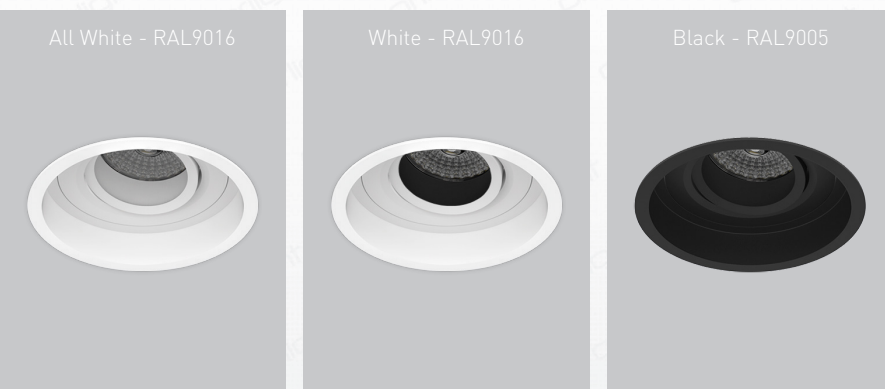

Product Coding: Example: ORLIR1M-AW-9016-NLH

| PREFIX | CODE | FINISH                      | LAMP HOLDER          |
|--------|------|-----------------------------|----------------------|
| ORL    | IR1M | AW-9016 (All White RAL9016) | NLH (NO LAMP HOLDER) |
|        |      | WH-9016 (White RAL9016)     |                      |
|        |      | BL (Black RAL9005)          |                      |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                            |
|-------------------|----------------------------|
| Reference Code:   | <b>L04</b>                 |
| Item Description: | Surface Mounted Wall Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Articolo   | Supplier: | The Specified  |
| Address:      |  | Address:  |  |
| Ph:           |  | Ph:       | 07799 186 680  |
| Contact:      |  | Contact:  | Vange  |
| Email:        |  | Email:    | <a href="mailto:london@articololighting.com">london@articololighting.com</a> |
| Web:          | <a href="http://www.articololighting.com">www.articololighting.com</a> | Web:      |  |

Product Name: Scandal Tall Wall Sconce  
 Code:  
 Colour:  
 Finish: Brass / brass mesh / clear fluted glass  
 Dimensions: H1080 x OD80 x projection 127mm.  
 Colour Temp: 2700K  
 Notes:

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| _____ | _____     | _____ |

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice



MEMBER



# SCANDAL COLLECTION


TALL WALL SCONCE

SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL



ARTICOLO

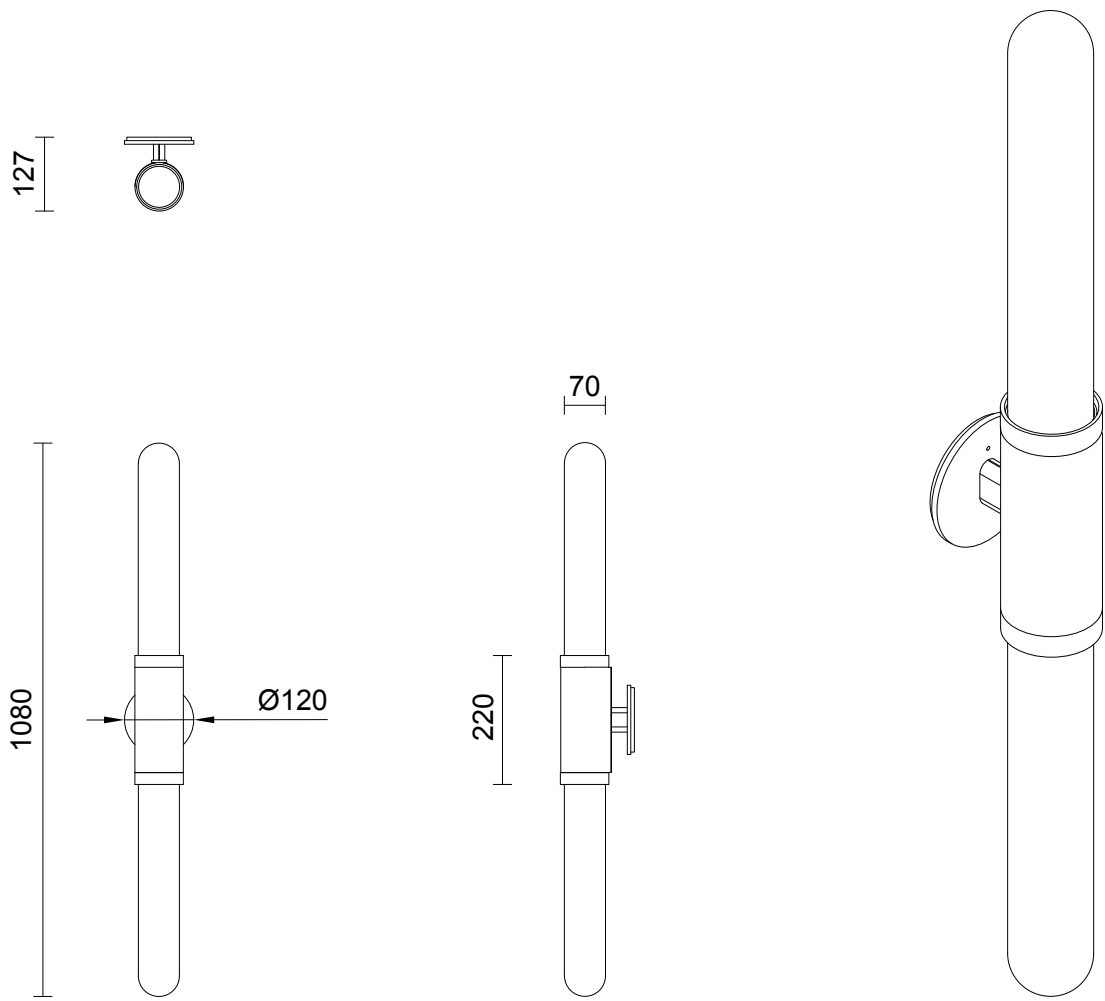

SA\_TWS\_AU\_21V1

**ABOUT SCANDAL**

The unification of luxurious crafts exists through the Scandal Collection. Scandal casts a slim and finely considered silhouette. Notable for its barrel-like cuff and inlay Scandal's elongated proportions are capped end-to-end by rounded mouthblown glass that conceals the light source, exemplifying the quiet brilliance of artisanal glass and metalwork.

**LEAD TIME**

6 - 8 weeks

**LIGHT SOURCE**

2 x 12V 7W LED MR16 GU5.3  
2700K warm white  
1000 total lumen output  
Dimmable  
Lamps included

**INSTALLATION**

Supplied with external driver

**WEIGHT**

6kg

**CERTIFICATION**

CE/AU

**WARRANTY**

3 years

**FITTING FINISHES**

Brass  
Mid Bronze  
Satin Nickel  
Black Electroplate

**INLAY**

Brass Mesh  
Silver Mesh  
Rose Gold Mesh  
Latte Leather  
Navy Leather

**SHADE COLOURS**

Snow  
Clear Fluted

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                                     |
|-------------------|-------------------------------------|
| Reference Code:   | <b>L05</b>                          |
| Item Description: | Flexible LED Linear Strip (Visible) |

|               |     |           |  |
|---------------|-----|-----------|--|
| Manufacturer: | TBC | Supplier: |  |
| Address:      |     | Address:  |  |
| Ph:           |     | Ph:       |  |
| Contact:      |     | Contact:  |  |
| Email:        |     | Email:    |  |
| Web:          |     | Web:      |  |

Product Name: TBC  
 Code:  
 Colour:  
 Finish:  
 Dimensions:  
 Colour Temp: 3000K  
 Notes:



Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHHARCHITECTS|INTERIORDESIGNERS


1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email info@shh.co.uk Website shh.co.uk  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice



MEMBER



|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                      |
|-------------------|----------------------|
| Reference Code:   | <b>L06(A)</b>        |
| Item Description: | Recessed Track Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

|               |                           |
|---------------|---------------------------|
| Product Name: | LC-B280-F8                |
| Code:         |                           |
| Colour:       | Black RAL 9005            |
| Finish:       |                           |
| Dimensions:   |                           |
| Colour Temp:  | 3000K                     |
| Notes:        | To include recessed track |

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
|       |           |       |

#### SHHARCHITECTS|INTERIORDESIGNERS


1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

RIBA   
 Chartered Practice



MEMBER


## CL-B280-F8 - 9W 8-Pod Track Mounted Bar

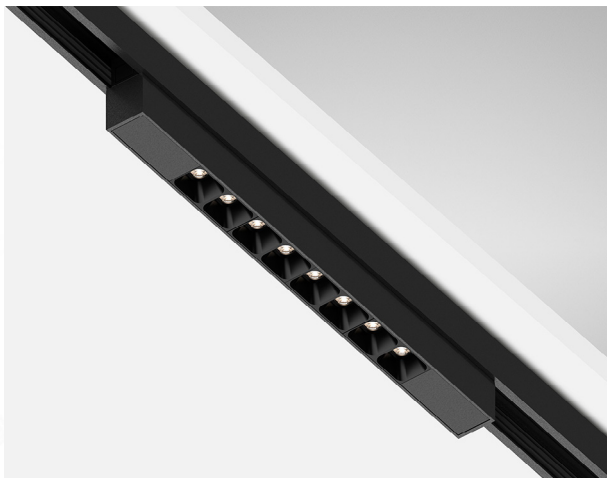


## Description

Slim 8 pod LED track mounted bar constructed from Aluminium and finished in Black RAL9005 with an Opal Diffuser. Available in 3000K colour temperature. CRI >90 for light quality assurance.

## Dimensions

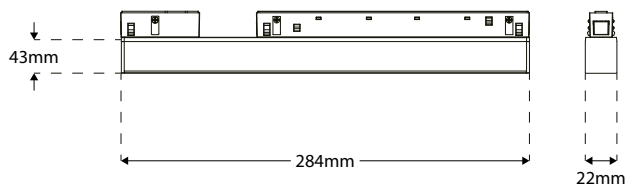

## Polar Curve

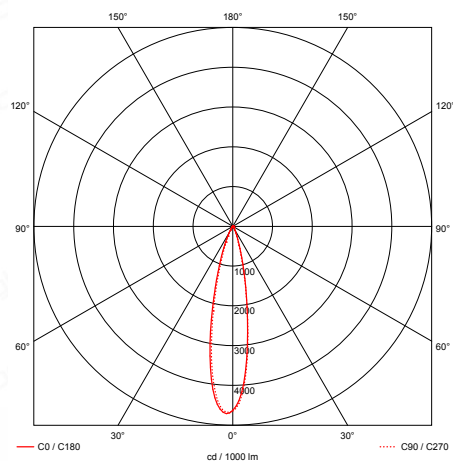

## Specifications

|                    |                                    |
|--------------------|------------------------------------|
| Light Source       | OSRAM LED                          |
| Dimming Options    | Switched                           |
| Voltage            | 48V                                |
| Power Consumption  | 8W Module Power / 9W Circuit Power |
| Colour Temperature | 3000K                              |
| Light Output       | 750lm                              |
| Lm Per Watt        | 83lm/W                             |
| Beam Angle         | 20°                                |
| CRI                | >90                                |
| Rotation           | Fixed                              |
| Tilt               | Fixed                              |
| IP Rating          | IP20                               |
| Material           | Aluminium                          |
| Finish             | Black RAL9005                      |

## Product Coding Example: CL-B280-F8-BL-3K

CODE

CL-B280-F8

FINISH

BL (Black RAL 9005)

COLOUR TEMPERATURE

3K

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                      |
|-------------------|----------------------|
| Reference Code:   | <b>L06(B)</b>        |
| Item Description: | Recessed Track Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

|               |                           |
|---------------|---------------------------|
| Product Name: | CL-B0280                  |
| Code:         |                           |
| Colour:       | Black RAL 9005            |
| Finish:       |                           |
| Dimensions:   |                           |
| Colour Temp:  | 3000K                     |
| Notes:        | To include recessed track |

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
|       |           |       |

#### SHHARCHITECTS|INTERIORDESIGNERS


1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

RIBA   
 Chartered Practice



MEMBER


## CL-B0280 - 7W LED Track Mounted Bar

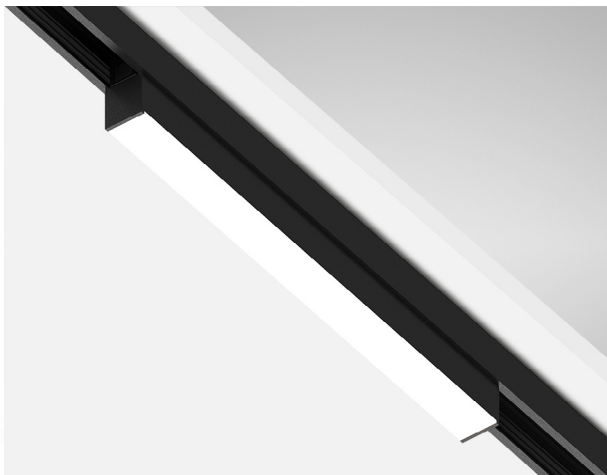


### Description

Slim LED track mounted bar constructed from Aluminium and finished in Black RAL9005 with an Opal Diffuser. Available in 2700K, 3000K and 4000K colour temperature. CRI >90 for light quality assurance.

### Dimensions

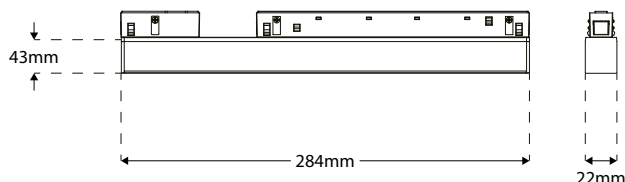

### Polar Curve

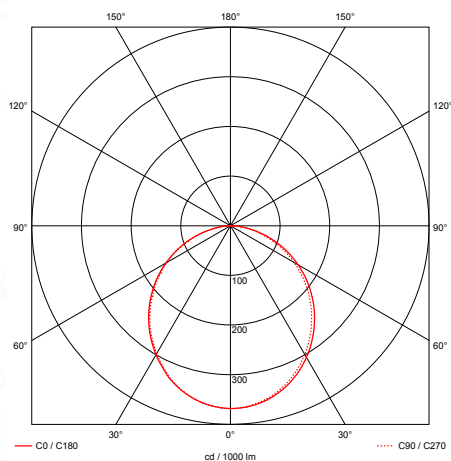

### Specifications

|                    |                                    |        |        |
|--------------------|------------------------------------|--------|--------|
| Light Source       | SAMSUNG LED                        |        |        |
| Dimming Options    | Switched                           |        |        |
| Voltage            | 48V                                |        |        |
| Power Consumption  | 6W Module Power / 7W Circuit Power |        |        |
| Colour Temperature | 2700K                              | 3000K  | 4000K  |
| Light Output       | 380lm                              | 400lm  | 445lm  |
| Lm Per Watt        | 54lm/W                             | 57lm/W | 64lm/W |
| CRI                | >90                                |        |        |
| Beam Angle         | 110°                               |        |        |
| Rotation           | Fixed                              |        |        |
| Tilt               | Fixed                              |        |        |
| IP Rating          | IP20                               |        |        |
| Material           | Aluminium with Opal Diffuser       |        |        |
| Finish             | Black RAL9005                      |        |        |

Product Coding Example: CL-B0280-BL-3K

CODE

CL-B0280

FINISH

BL (Black RAL 9005)

COLOUR TEMPERATURE

27K

3K

4K

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                     |
|-------------------|---------------------|
| Reference Code:   | <b>L07</b>          |
| Item Description: | Bespoke LED Fitting |

|               |     |           |  |
|---------------|-----|-----------|--|
| Manufacturer: | TBC | Supplier: |  |
| Address:      |     | Address:  |  |
| Ph:           |     | Ph:       |  |
| Contact:      |     | Contact:  |  |
| Email:        |     | Email:    |  |
| Web:          |     | Web:      |  |

Product Name:

Code:


Colour:

Finish: MC 05. Refer to Finishes Schedule.

Dimensions:

Colour Temp: 3000K

Notes:

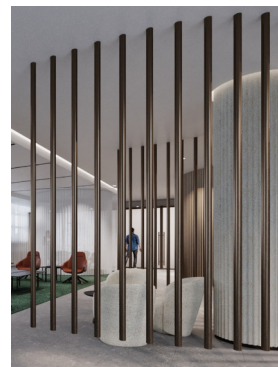

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email info@shh.co.uk Website shh.co.uk  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice



MEMBER

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                       |
|-------------------|-----------------------|
| Reference Code:   | <b>L08</b>            |
| Item Description: | Modular Light Fitting |

|               |     |           |  |
|---------------|-----|-----------|--|
| Manufacturer: | TBC | Supplier: |  |
| Address:      |     | Address:  |  |
| Ph:           |     | Ph:       |  |
| Contact:      |     | Contact:  |  |
| Email:        |     | Email:    |  |
| Web:          |     | Web:      |  |

|               |             |  |
|---------------|-------------|--|
| Product Name: |             |  |
| Code:         |             |  |
| Colour:       |             |  |
| Finish:       |             |  |
| Dimensions:   | 600 x 600mm |  |
| Colour Temp:  |             |  |
| Notes:        |             |  |

**Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:**

|                                     |                                    |
|-------------------------------------|------------------------------------|
| <input checked="" type="checkbox"/> | Product Sample                     |
| <input type="checkbox"/>            | Cutting                            |
| <input type="checkbox"/>            | Shop Drawing                       |
| <input type="checkbox"/>            | Fire Test Certificate              |
| <input type="checkbox"/>            | BREEAM / Green Guide Certification |
| <input type="checkbox"/>            | Seaming Diagram                    |
| <input type="checkbox"/>            | VOC Certification                  |
| <input type="checkbox"/>            | Prototype                          |


**GENERAL NOTES:**

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

**CLIENT SIGN OFF:**

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
|       |           |       |



|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                           |
|-------------------|---------------------------|
| Reference Code:   | <b>L09</b>                |
| Item Description: | Single Recessed Downlight |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

Product Name: TEMPUS-2-MINI  
 Code:  
 Colour: White  
 Finish:  
 Dimensions:  
 Colour Temp: 3000K  
 Notes:

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHH ARCHITECTS | INTERIOR DESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice




MEMBER




## TEMPUS-2-MINI - Compact 3W Recessed LED



### Polar Report

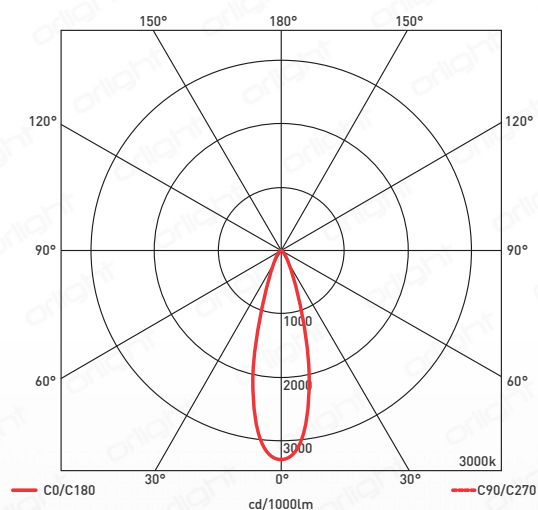

### Alternative Finishes

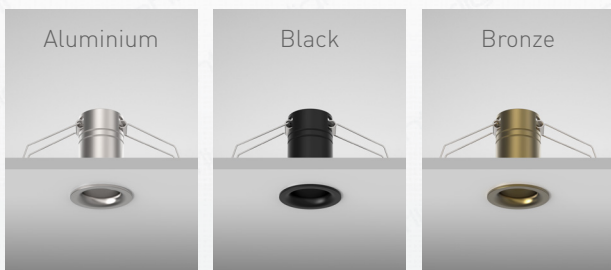


### Description

Aluminium 3W LED miniature fixture featuring recessed COB CITIZEN CLU0B0 LED light source. Construction rated to IP54 allowing for versatile application. A 3 Step MacAdams binning strategy ensures colour consistency with single chip technology providing a consistent beam. Light quality assurance with CRI > Ra 80.

*Fire rated to 90 minutes.*

### Dimensions

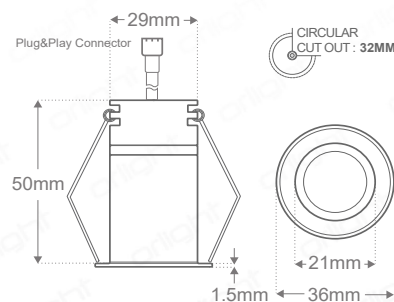

### Specifications

|                     |   |        |        |
|---------------------|---|--------|--------|
| Chipset             | COB CITIZEN CLU0B0  |        |        |
| Dimming Options     | MAINS; 1-10V; DALI  |        |        |
| Power Consumption   | 2.5W Fixture Power / 3W Circuit Power                       |        |        |
| Current             | 140mA   |        |        |
| Voltage             | 18V   |        |        |
| Colour Temperature  | 2700K   | 3000K  | 4000K  |
| Light Output ~      | 250lm   | 260lm  | 280lm  |
| lm Per Watt ~       | 83lm/W  | 87lm/W | 93lm/W |
| CRI                 | >80   | >80    | >80    |
| Beam Angle          | 30°   |        |        |
| Binning             | 3 Step MacAdams Ellipse                                     |        |        |
| Chip Life TM-21     | L70 > 55,000 hours  |        |        |
| Ambient Temperature | -20°C ~ 45°C  |        |        |
| Cutout              | 32mm  |        |        |
| Aperture Size       | 21mm  |        |        |
| IP Rating           | IP54  |        |        |
| Fire Rated          | 90 Minutes  |        |        |
| Weight              | 40g   |        |        |
| Material            | Aluminum  |        |        |
| Finish              | White - Epoxy Powder Coat; Aluminium; Black RAL9005; Bronze |        |        |


### Colourmetrics

| 2700K |     |     |     |     |     |     |    | 3000K |     |     |     |     |     |     |    | 4000K |     |     |     |     |     |     |    |
|-------|-----|-----|-----|-----|-----|-----|----|-------|-----|-----|-----|-----|-----|-----|----|-------|-----|-----|-----|-----|-----|-----|----|
| R1    | R2  | R3  | R4  | R5  | R6  | R7  | R8 | R1    | R2  | R3  | R4  | R5  | R6  | R7  | R8 | R1    | R2  | R3  | R4  | R5  | R6  | R7  | R8 |
| 83    | 93  | 95  | 83  | 84  | 93  | 82  | 59 | 84    | 93  | 96  | 84  | 85  | 92  | 84  | 62 | 84    | 90  | 95  | 85  | 84  | 87  | 88  | 69 |
| R9    | R10 | R11 | R12 | R13 | R14 | R15 |    | R9    | R10 | R11 | R12 | R13 | R14 | R15 |    | R9    | R10 | R11 | R12 | R13 | R14 | R15 |    |
| 11    | 85  | 85  | 81  | 85  | 98  | 74  |    | 14    | 84  | 85  | 77  | 86  | 99  | 76  |    | 20    | 77  | 85  | 66  | 86  | 97  | 79  |    |

Product Coding: Example: TEMPUS-2-MINI-WH-3000K-DALI

\*Accessories


| CODE          | FINISH       | COLOUR TEMPERATURE | DIMMING OPTION        | DRIVERS                  |
|---------------|--------------|--------------------|-----------------------|--------------------------|
| TEMPUS-2-MINI | WH (RAL9016) | 2700K              | D - (MAINS DIM)       | TEMPUS-2-MINI-DR-DIM-2IC |
|               | AL           | 3000K              | 1-10V                 | JOLLY-MINI-1-10-LC (*)   |
|               | BL (RAL9005) | 4000K              | DALI                  | JOLLY-MINI-DALI-LC (*)   |
|               | BR           |                    | *Refer to Accessories | REMOTE DRIVERS (*)       |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                                       |
|-------------------|---------------------------------------|
| Reference Code:   | <b>L10</b>                            |
| Item Description: | Flexible LED Linear Strip (Concealed) |

|               |     |           |  |
|---------------|-----|-----------|--|
| Manufacturer: | TBC | Supplier: |  |
| Address:      |     | Address:  |  |
| Ph:           |     | Ph:       |  |
| Contact:      |     | Contact:  |  |
| Email:        |     | Email:    |  |
| Web:          |     | Web:      |  |

Product Name: TBC  
 Code:  
 Colour:  
 Finish:  
 Dimensions:  
 Colour Temp: 3000K  
 Notes:

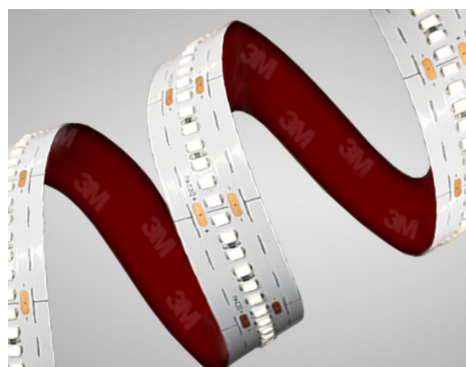

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHH ARCHITECTS | INTERIOR DESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email info@shh.co.uk Website shh.co.uk  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice



MEMBER

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |               |
|-------------------|---------------|
| Reference Code:   | <b>L11</b>    |
| Item Description: | Pendant Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Vibia  | Supplier: | Viaduct  |
| Address:      |  | Address:  | 1-10 Summers St, London EC1R 5BD                         |
| Ph:           |  | Ph:       |  |
| Contact:      |  | Contact:  | 020 7278 8456  |
| Email:        |  | Email:    |  |
| Web:          | <a href="http://www.vibia.com">www.vibia.com</a> | Web:      | <a href="http://www.viaduct.co.uk">www.viaduct.co.uk</a> |

Product Name: Flat  
 Code: 5940  
 Colour: 5940-47 Green L1  
 Finish:  
 Dimensions: OD 550 x H800mm. Drop 2000mm  
 Colour Temp: 2700K  
 Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| _____ | _____     | _____ |

# Flat

Design by Ichiro Iwasaki.

## Reference

**5940.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Flat lamps are a creation from the designer Ichiro Iwasaki. The discs of light descend from the ceiling to form a hanging lamp, where the planes of reflected light blend in with the architecture. All the models in the Flat collection incorporate LED lighting and are available in a range of neutral colour tones.

## Diffuser

Polycarbonate diffuser

## Materials

Ceiling rose: Steel  
Reflector: Aluminum  
Body: Steel  
Head: Aluminium

## Finish



**5940-13** Grey L1 (NCS S 1000-N)




**5940-37** Terra Red (NCS S 4040-Y70R)



**5940-47** Green L1 (NCS S 4005-G80Y)

## Sketch



## Electrical characteristics

1 x LED PLATE 13,5W 700mA

Total 13.5 W



# VIBIA



**Light source:** 2700K CRI >90 1740 lm 128 lm/W

**Driver included:** CC - Constant Current 700 mA 110~240V 50/60Hz

**Electronic dimming** DALI 1-10V Push

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.0156 m³ /  
Gross weight 2.7 kg. / Net weight 2.2 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



## Photometric data

Efficiency : 57.15 lm/W


Coordinate system : CG

Total flux : 841.92 lm

Maximum value : 207.17 cd

Light position : C=0.00 G=12.50


Symmetry on the planes : Double symmetrical



Isolux : floor

Light position :

X=0.00m Y=0.00m Z=2.50m



## Certificates



|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                           |
|-------------------|---------------------------|
| Reference Code:   | <b>L12</b>                |
| Item Description: | Surface Mounted Downlight |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Intra Lighting   | Supplier: | Atrium   |
| Address:      |  | Address:  | 28 Leonard St, London EC2A 4BY                           |
| Ph:           |  | Ph:       |  |
| Contact:      |  | Contact:  | 020 7681 9933  |
| Email:        |  | Email:    |  |
| Web:          | <a href="http://www.intra-lighting.com">www.intra-lighting.com</a> | Web:      | <a href="http://www.atrium.ltd.uk">www.atrium.ltd.uk</a> |

Product Name: Nucleo C  
 Code:  
 Colour: White  
 Finish:  
 Dimensions: OD 252 x H200mm  
 Colour Temp: 3000K  
 Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| _____ | _____     | _____ |



# Nucleo C

3900 lm 37 W 830 DALI 30° IP20 black

ARTICLE NO: 12481213102


Project name:

Reference:

Quantity:



## Dimension




Dimension (mm): D: 252 H: 200


## Product description

**Optic** Metalized polycarbonate optic with lacquer finish, uniform distribution **Material** Aluminium, powder coated **Nominal luminaire luminous flux** 3900 lm **Luminaire luminous flux** 3922 lm **Light source luminous flux** 4560 lm **Power** 37,00 W **Correlated colour temperature - CCT** 3000 K **Colour rendering index - CRI** 80 **Chromaticity tolerance (initial MacAdam)** 3 **Lumen maintenance factor** 50000h L80 B10 at 35°C **Driver** DALI dimmable LED driver **Power supply** 230V 50Hz **IP protection** IP20 , IP protection **EAN No.** 3831123241172 **Energy class** A++ **Colour** Black **Optics** Spot optic 30°

## Photometry

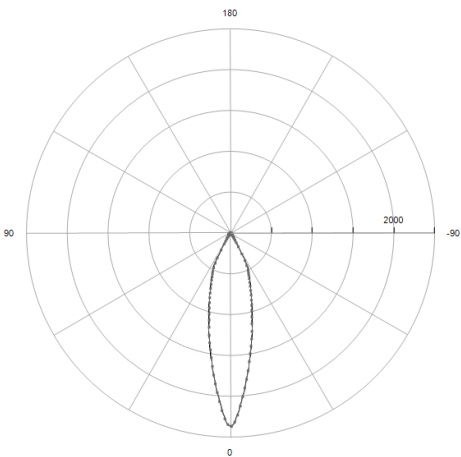

| Light output ratio       |                  |
|--------------------------|------------------|
| LOR                      | 100              |
| ULOR                     | 0                |
| DLOR                     | 100              |
| Luminaire luminous flux  | 3502             |
| Luminaire efficacy (LEF) | 94               |
| UGR values               |                  |
| X=4H, Y=8H               | S = 0,25H        |
| Radiant class            | 70/50/20         |
| Transverse               | 9.4              |
| Longitudinal             | 9.3              |
| Classification           |                  |
| BZ                       | BZ 1             |
| UTE                      | 0.77 A           |
| DIN                      | A60              |
| CIE                      | 95 99 100 100 77 |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                            |
|-------------------|----------------------------|
| Reference Code:   | <b>L13</b>                 |
| Item Description: | Surface Mounted Wall Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Intra Lighting   | Supplier: | Atrium   |
| Address:      |  | Address:  | 28 Leonard St, London EC2A 4BY                           |
| Ph:           |  | Ph:       |  |
| Contact:      |  | Contact:  | 020 7681 9933  |
| Email:        |  | Email:    |  |
| Web:          | <a href="http://www.intra-lighting.com">www.intra-lighting.com</a> | Web:      | <a href="http://www.atrium.ltd.uk">www.atrium.ltd.uk</a> |

Product Name: Camay WDI  
 Code:  
 Colour: Black  
 Finish:  
 Dimensions: L1795 x H95 x D48mm  
 Colour Temp: 3000K  
 Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|



# Camay WDI

DI SOP 2850+2950 lm 29+29 W 830 L1795 mm DALI-DS IP40 black

ARTICLE NO: 13469950052

Project name:


Reference:

Quantity:



● Black

## Dimension




Dimension (mm): L: 1795 W: 48 H: 95


## Product description

**Optic** Satin opal polycarbonate diffuser **Material** Extruded aluminium profile with decorative glass side plate, powder coated; screw-less polycarbonate end caps  
**Luminaire luminous flux** 5820 lm **Light source luminous flux** 9000 lm **Power** 58,80 W **Correlated colour temperature - CCT** 3000 K  
**Colour rendering index - CRI** 80 **Chromaticity tolerance (initial MacAdam)** 3  
**Lumen maintenance factor** 50000h L90 B10 at 35°C **Driver** DALI dimmable LED driver, separate drivers for direct and indirect illumination **Switching options** Double Switching **Power supply** 230V 50Hz **IP protection** IP40 , IP protection **IK protection** IK05 **Energy class** A++ **Colour** Black

## Photometry

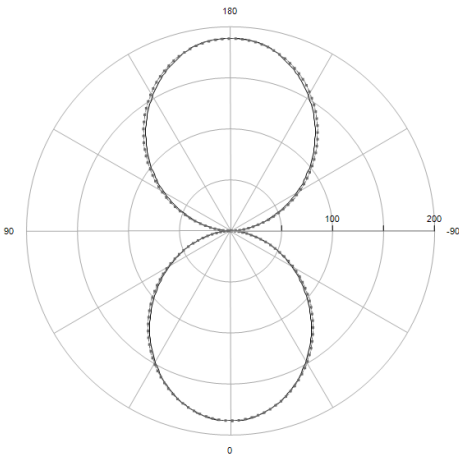

|                           |                 |
|---------------------------|-----------------|
| <b>Light output ratio</b> |                 |
| LOR                       | 100             |
| ULOR                      | 50,7            |
| DLOR                      | 49,3            |
| Luminaire luminous flux   | 5819            |
| Luminaire efficacy (LEF)  | 99              |
| <b>UGR values</b>         |                 |
| X=4H, Y=8H                | S = 0,25H       |
| Radiant class             | 70/50/20        |
| Transverse                | 22.0            |
| Longitudinal              | 21.9            |
| <b>Classification</b>     |                 |
| BZ                        | BZ 4            |
| UTE                       | 0.49 E + 0.51 T |
| DIN                       | C32             |
| CIE                       | 49 80 96 49 100 |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                |
|-------------------|----------------|
| Reference Code:   | <b>L14</b>     |
| Item Description: | Track Lighting |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Erco Lighting  | Supplier: |  |
| Address:      | 38 Dover St, London W1S 4NL  | Address:  |  |
| Ph:           | 020 7344 4900  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@erco.com">info@erco.com</a>                           | Email:    |  |
| Web:          | <a href="http://www.erco.com/great-britain">www.erco.com/great-britain</a> | Web:      |  |

Product Name: Parscan  
 Code:  
 Colour: White  
 Finish:  
 Dimensions:  
 Colour Temp: 3000K  
 Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| _____ | _____     | _____ |



## Parscan – Systematic diversity

### **The elegant and universal spotlight system for museums and shops**

Light, not luminaires – this is the foundation on which the sleek, cylindrical shape of Parscan is modelled. Different lighting solutions can be implemented efficiently thanks to precise and flexible photometrics. If the spotlight is directed vertically downwards as a downlight, the support bracket merges into the cylindrical shape. With its black housing, compact shape and a luminaire head that barely swivels out when rotated or tilted, the Parscan is also ideal for

mounting in ceiling channels. The excellent glare control enhances visual comfort even in challenging lighting situations. Displaying a minimalist design, the luminaire appears unobtrusive in museums, shops or places of worship.



### Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

#### 1 ERCO Spherolit lens

- Light distributions: narrow spot, spot, flood, wide flood, extra wide flood, oval flood or wallwash
- Oval flood 360° rotation

or

#### Attachment (zoom spotlight)

- Zoom lens, continuously focusable
- Light distributions: zoom spot, zoom oval
- Zoom oval 360° rotation

#### 2 ERCO LED-module

- High-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)
- Collimating lens made of optical polymer

#### 3 Housing and bracket

- White (RAL9002), black or silver
- Cast aluminium, powder-coated
- 0°-90° tilt
- Bracket on adapter rotatable through 360°

#### 4 Control gear

- Switchable, phase dimmable+On-board Dim, DALI dimmable or Casambi Bluetooth
- Phase dimmable + On-board Dim version: Dimming with external dimmers (trailing edge) possible and rotary control for brightness control on the luminaire

#### 5 ERCO 3-circuit adapter or ERCO DALI adapter

#### Variants on request

- Housing: 10,000 further colours
- Please contact your ERCO consultant.



Design and application:  
[www.erco.com/parscan](http://www.erco.com/parscan)

## Parscan for track 220-240V




### Oval flood freely rotatable

The oval flood Spherolit lens can be freely rotated with round luminaire heads to optimally match the lighting to various objects.



### Large lumen packages for very high illuminances

The attention of the viewer can be focused via contrasting accents. ERCO has high-performance luminaires with large lumen packages in its range for this purpose.



### Zoom spotlights

The light beam diameter can be infinitely adjusted from spot (15°) to wide flood (65°) by simply turning the lens. Zoom spotlights are particularly suitable for illuminating areas with changing exhibits and merchandise.



### Small luminaire dimensions

Small luminaires are discreet and place the focus on the light itself. Compact luminaire dimensions are particularly advantageous with small rooms.



### Ideal for ceiling channels

The minimalist design of Parscan is suitable for situations in which the luminaire should appear as discreet as possible - for example in museums or shops. If the luminaires are integrated into the ceiling channel they remain almost completely concealed.

### Special characteristics



Large lumen packages for very high illuminances



Oval flood, freely rotatable



Zoom spotlight



Small luminaire dimensions



Ideal for ceiling channels



ERCO high-power LEDs



Efficient Spherolit technology



Different light distributions



Different light colours



Excellent thermal management



EMC-optimised



Various housing colours



Various construction sizes



Pivotable through 90°



Accessory for maximum visual comfort



Switchable



Phase dimmable + On-board Dim



DALI dimmable




Casambi Bluetooth

## Parscan for track 220-240V – Luminaire arrangement

### Spotlights

Narrow spot, Spot, Flood

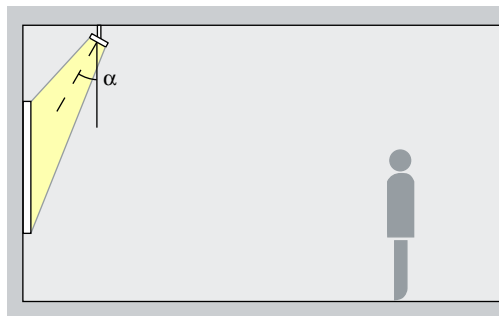


### Accentuation

Parscan spotlights accentuate art-work, products and architectural details effectively. The ideal angle of tilt ( $\alpha$ ) for this is around  $30^\circ$ . The object is modelled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.

Arrangement:  $\alpha = 30^\circ$

### Zoom spotlights

Zoom spot, Zoom oval

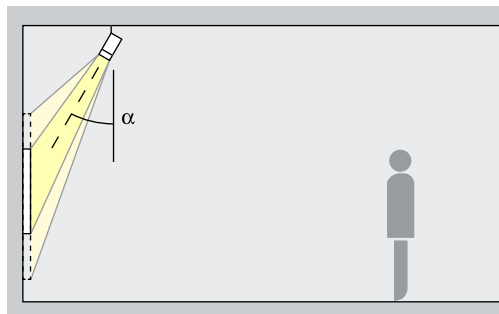


### Accentuation

Zoom spotlights feature a continuously adjustable beam angle. With the spot to wide flood zoom range, smaller works of art can be accentuated effectively at an inclination angle ( $\alpha$ ) of approximately  $30^\circ$ . The oval zoom is suitable for linear works of art. The object is modelled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.

Arrangement:  $\alpha = 30^\circ$

### Floodlights

Wide flood, Extra wide flood, Oval flood

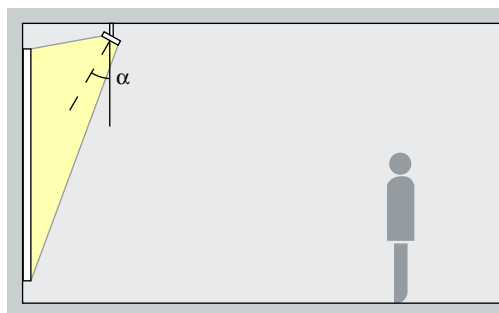


### Washlighting

The ideal angle of tilt ( $\alpha$ ) for flood-lighting objects with a long, square shape, e.g. pictures, sculptures or merchandise displays, is around  $30^\circ$ .

Arrangement:  $\alpha = 30^\circ$

### Lens wallwashers


Wallwash

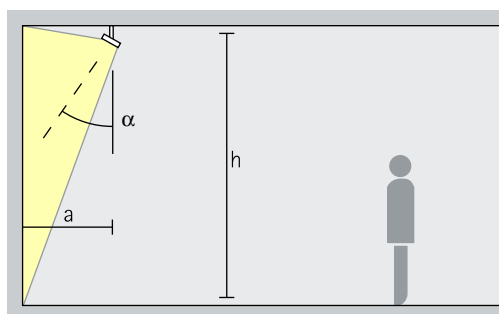

### Wallwashing

For uniform vertical illuminance, the distance ( $a$ ) of Parscan lens wallwashers from the wall should be around one third of the room height ( $h$ ). This results in an angle of tilt ( $\alpha$ ) of approx.  $35^\circ$ .

Arrangement:  $a = 1/3 \times h$  or  
 $\alpha = 35^\circ$

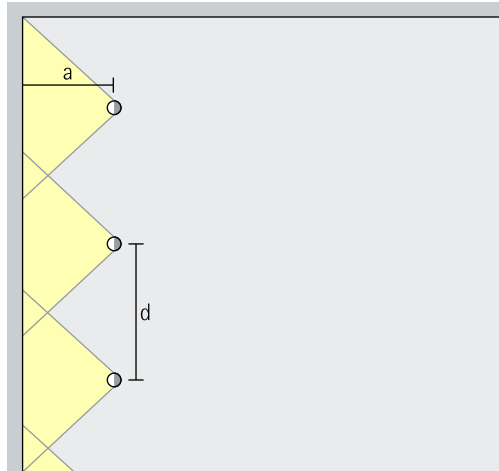

For good longitudinal uniformity, the spacing ( $d$ ) of Parscan lens wallwashers may be up to 1.2 times the offset from the wall ( $a$ ).

Arrangement:  $d \leq 1.2 \times a$

The optimal wall offset and luminaire spacing for each product are indicated in the wallwasher tables in the catalogue and the product data sheets.


Barbican Centre,  
"The Brits Who  
Built The Modern  
World" exhibition,  
London. Photo-  
grapher: Frieder  
Blickle, Hamburg.







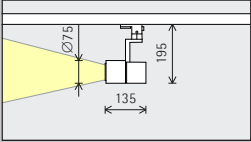



Parscan for track 220-240V









Construction size










Ø 75mm





|                               |          |                        |
|-------------------------------|----------|------------------------|
| LED module                    | 6W/825lm | 2W/275lm (Narrow spot) |
| Maximum value at 4000K CRI 82 |          |                        |


|              |   |              |   |              |
|--------------|---|--------------|---|--------------|
| Light colour |  | 2700K CRI 92 |  | 3500K CRI 92 |
|              |  | 3000K CRI 92 |  | 4000K CRI 82 |
|              |  | 3000K CRI 97 |  | 4000K CRI 92 |

|                    |   |  |
|--------------------|---|--|
| Light distribution | Spotlights  | Floodlights  |
|                    |  Narrow spot |  Wide flood       |
|                    |  Spot        |  Extra wide flood |
|                    |  Flood       |  Oval flood       |
|                    | Zoom spotlights   | Lens wallwashers   |
|                    |  Zoom spot |  Wallwash       |
|                    |  Zoom oval |  |

|         |   |   |
|---------|---|---|
| Control |  Switchable                    |  DALI              |
|         |  Phase dimmable + On-board Dim |  Casambi Bluetooth |



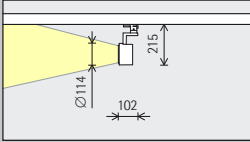



|                  |   |  |
|------------------|---|--|
| Colour (housing) |  White |  Silver           |
|                  |  Black |  10,000 colours * |






|             |  |   |
|-------------|--|---|
| Accessories |  Lenses |  Cross-baffle                |
|             |  Snoots |  Honeycomb anti-glare screen |











Ø 114mm


|  |            |                        |
|--|------------|------------------------|
|  | 12W/1650lm | 4W/550lm (Narrow spot) |
|--|------------|------------------------|

|  |              |   |              |
|--|--------------|---|--------------|
|  | 2700K CRI 92 |  | 3500K CRI 92 |
|  | 3000K CRI 92 |  | 4000K CRI 82 |
|  | 3000K CRI 97 |  | 4000K CRI 92 |

|   |  |
|---|--|
| Spotlights  | Floodlights  |
|  Narrow spot |  Wide flood       |
|  Spot        |  Extra wide flood |
|  Flood       |  Oval flood       |
| Zoom spotlights   | Lens wallwashers   |
|  Zoom spot |  Wallwash       |
|  Zoom oval |  |

|  |   |
|--|---|
|  Switchable                     |  DALI              |
|  Phase dimmable + On-board Dim |  Casambi Bluetooth |

|  |  |
|--|--|
|  White |  Silver           |
|  Black |  10,000 colours * |



Ø 149mm


|            |                         |
|------------|-------------------------|
| 24W/3300lm | 8W/1100lm (Narrow spot) |
|------------|-------------------------|

|              |              |
|--------------|--------------|
| 2700K CRI 92 | 3500K CRI 92 |
| 3000K CRI 92 | 4000K CRI 82 |
| 3000K CRI 97 | 4000K CRI 92 |

| Spotlights  | Floodlights      |
|-------------|------------------|
| Narrow spot | Wide flood       |
| Spot        | Extra wide flood |
| Flood       | Oval flood       |
|             | Lens wallwashers |
|             | Wallwash         |

|                               |                   |
|-------------------------------|-------------------|
| Switchable                    | DALI              |
| Phase dimmable + On-board Dim | Casambi Bluetooth |

|       |                  |
|-------|------------------|
| White | Silver           |
| Black | 10,000 colours * |



Ø 188mm

|            |                          |
|------------|--------------------------|
| 48W/6600lm | 18W/2475lm (Narrow spot) |
|------------|--------------------------|

|              |              |
|--------------|--------------|
| 2700K CRI 92 | 3500K CRI 92 |
| 3000K CRI 92 | 4000K CRI 82 |
| 3000K CRI 97 | 4000K CRI 92 |

| Spotlights  | Floodlights      |
|-------------|------------------|
| Narrow spot | Wide flood       |
| Spot        | Extra wide flood |
| Flood       | Oval flood       |
|             | Lens wallwashers |
|             | Wallwash         |

|                               |                   |
|-------------------------------|-------------------|
| Switchable                    | DALI              |
| Phase dimmable + On-board Dim | Casambi Bluetooth |

|       |                  |
|-------|------------------|
| White | Silver           |
| Black | 10,000 colours * |


\* available on request

Article numbers and planning data:  
[www.erco.com/012323](http://www.erco.com/012323)

Design and application:  
[www.erco.com/parscan](http://www.erco.com/parscan)





|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |                                      |
|-------------------|--------------------------------------|
| Reference Code:   | <b>L15</b>                           |
| Item Description: | Double Recessed Adjustable Downlight |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

Product Name: ORLIR2M  
 Code:  
 Colour: All White  
 Finish:  
 Dimensions:  
 Colour Temp: 3000K  
 Notes:

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice



MEMBER






## ORLIR2M - Thin Twin Trim Round Magnetic Fixture


### Description

This round thin twin trim downlight features round minimalistic design with 'thin trim' bezel to appear almost trimless in-situ. This round minimalist fixture does not compromise on technical performance with magnetic lamp change facility. An anti-glare baffle functions to enhance visual comfort.


### Dimensions

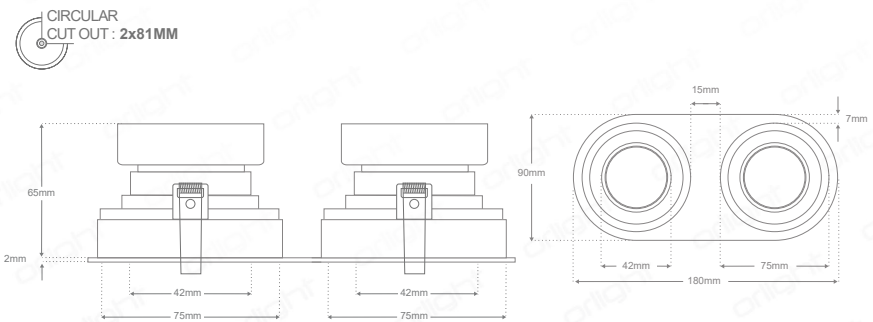

### Dimensions w/Lamp: LUMENSTAR 3 ; LUMENPLUS 3

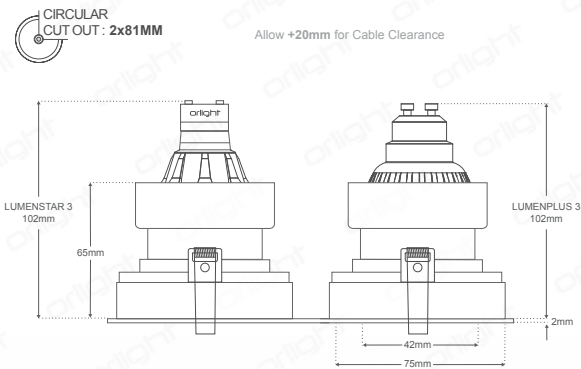

### Dimensions w/Engine: DB-R999 Range

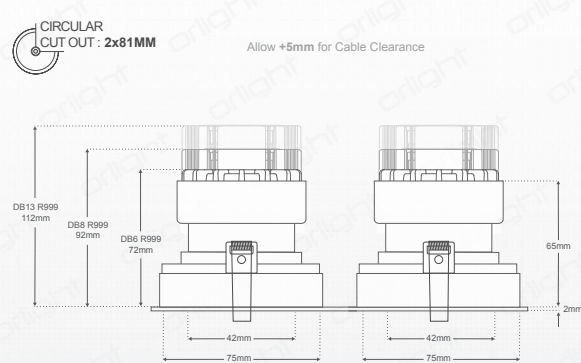

### Specifications

|                   |   |
|-------------------|---|
| Lamps             | LUMENPLUS 3 ; LUMENSTAR 3 ; DB-R999 Range |
| Construction      | Aluminium Frame / Magnetic Ring           |
| Lamp Change       | Magnetic Lamp Change Mechanism            |
| Power Consumption | Variable Light Source                     |
| Voltage           | Max. 240V                                 |
| Rotation          | 360°                                      |
| Tilt              | 20°                                       |
| Cutout            | 2 x 81mm - Circular                       |
| Anti-Glare        | Yes                                       |
| IP Rating         | IP20                                      |
| Accessories       | GU10 Lamp Holder (MC2)                    |
| Finish            | Epoxy Powder Coat; All White - RAL9016    |

Product Coding: Example: ORLIR2M-AW-9016

PREFIX


CODE

FINISH

ORL

IR2M

AW-9016

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |                   |
|-------------------|-------------------|
| Reference Code:   | <b>L16</b>        |
| Item Description: | Modular Luminaire |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

|               |          |
|---------------|----------|
| Product Name: | SASI1215 |
| Code:         |          |
| Colour:       | White    |
| Finish:       |          |
| Dimensions:   |          |
| Colour Temp:  | 4000K    |
| Notes:        |          |

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
|       |           |       |

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

RIBA   
 Chartered Practice



MEMBER




## SASI1215 - SASI 1215 Air Handling Luminaire




## Description

SASI 1200 x 150 Air Handling Luminaire. Utilises high intensity Samsung LED's to achieve up to 85 lumens per circuit Watt with CRI options available of up to CRI90. Matte White finished Aluminium surround with PMMA diffuser. Product can be adjusted to fit within any ceiling grid. Compliant with DALI or 0-10V protocols. 3 Hour emergency version available.

## Dimensions

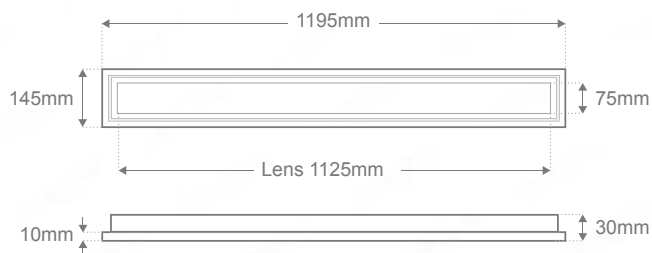

## Polar Report

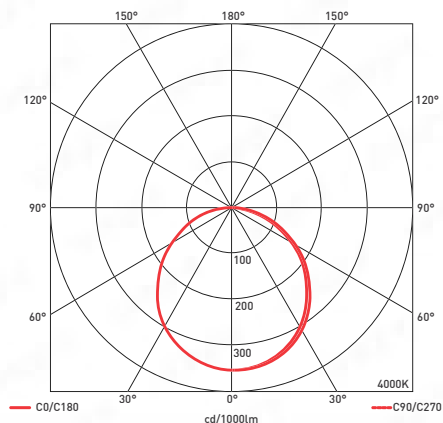

## Specifications

|                       |                                 |                             |
|-----------------------|---------------------------------|-----------------------------|
| Chipset               | Samsung L561B                   |                             |
| Dimming Options       | 0-10V; DALI                     |                             |
| Voltage               | 40-45V                          |                             |
| Beam Angle            | Wide                            |                             |
| Binning               | 2 Step MacAdams Ellipse         |                             |
| Chip Life TM-21       | Calculated: L70 = 135,000 hours | Reported: L70 >36,000 hours |
| IP Rating             | 20                              |                             |
| Air Handling Capacity | 40 Litres per second            |                             |
| Weight                | -                               |                             |
| Finish                | Epoxy Powder Coat               |                             |

## Standard - Lumen Output Table


| Power Consumption  | 15W    | 20W    | 25W    | 30W    | 40W    | 45W    |
|--------------------|--------|--------|--------|--------|--------|--------|
| Current            | 350mA  | 500mA  | 600mA  | 700mA  | 900mA  | 1050mA |
| Colour Temperature | 4000K  | 4000K  | 4000K  | 4000K  | 4000K  | 4000K  |
| Light Output ~     | 1176lm | 1673lm | 1997lm | 2316lm | 2939lm | 3396lm |
| lm Per Watt ~      | 78lm/W | 84lm/W | 80lm/W | 77lm/W | 73lm/W | 75lm/W |
| CRI                | >85    | >85    | >85    | >85    | >85    | >85    |

Product Coding: Example: SASI1215-4000K-DALI

| CODE     | COLOUR TEMP | DIMMING OPTION        | EMERGENCY OPTION |
|----------|-------------|-----------------------|------------------|
| SASI1215 | 4000K       | ND - (SWITCHED)       | EM               |
|          |             | 0-10V                 | EM               |
|          |             | DALI                  | EM               |
|          |             | *Refer to Accessories |                  |

## \*Accessories

| DRIVERS               | WATTAGE                |
|-----------------------|------------------------|
| DR40LCM               | 15W - (CURRENT 350mA)  |
| DR60LCM               | 20W - (CURRENT 500mA)  |
| DALIDR60LCM           | 25W - (CURRENT 600mA)  |
| Multi Current Drivers | 30W - (CURRENT 700mA)  |
|                       | 40W - (CURRENT 900mA)  |
|                       | 45W - (CURRENT 1050mA) |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |                |
|-------------------|----------------|
| Reference Code:   | <b>L17</b>     |
| Item Description: | IP65 Downlight |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

|               |            |
|---------------|------------|
| Product Name: | SHOWERSPOT |
| Code:         |            |
| Colour:       | White      |
| Finish:       |            |
| Dimensions:   |            |
| Colour Temp:  |            |
| Notes:        |            |

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
|       |           |       |

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

RIBA   
 Chartered Practice



MEMBER




## SHOWERSPOT - IP65 Showerspot Downlight


### Description

IP65 ShowerSpot Fixture featuring die-cast Aluminium construction with double-tempered safety glass. Product incorporates a simple clip lamp change mechanism with removable fascia for ease of maintenance. Fixture is available in a variety of finishes.

### Dimensions

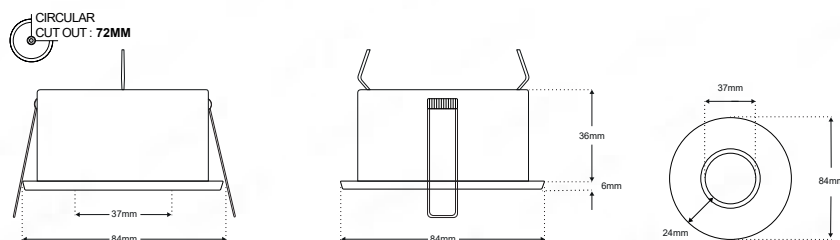


### Dimensions w/Lamp: LUMENSTAR 3 ; LUMENPLUS 3

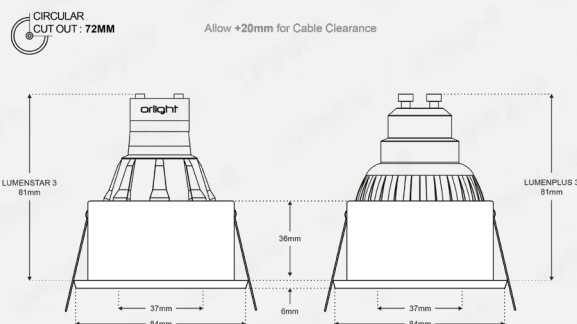

### Specifications

|                   |   |
|-------------------|---|
| Lamps             | LUMENSTAR 3 ; LUMENPLUS 3 ; DB-R999 Range                           |
| Construction      | Aluminium Frame   |
| Lamp Change       | Clip Lamp Change Mechanism  |
| Power Consumption | Variable Light Source   |
| Voltage           | Max. 240V   |
| Tilt              | Fixed   |
| Rotation          | Fixed   |
| Cutout            | 72mm - Circular   |
| Anti-Glare        | Yes   |
| IP Rating         | 65  |
| Accessories       | GU10 Lamp Holder (MC1)  |
| Finish            | Solid Colours - Epoxy Powder Coat; Metallic Finishes - Electroplate |

### Dimensions w/Lamp: DB-R999 Range

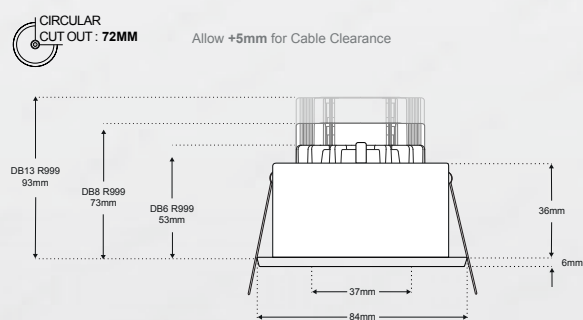

### Finishes



### Product Coding: Example: SHOWERSPOT-SC

CODE


SHOWERSPOT

FINISH

WH-9016 (White RAL9016)

CH (Chrome)

SC (Satin Chrome)

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |                      |
|-------------------|----------------------|
| Reference Code:   | <b>L18</b>           |
| Item Description: | Plaster-in LED Strip |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Orlight  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 01923 851 890  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@orlight.com">info@orlight.com</a> | Email:    |  |
| Web:          | <a href="http://www.orlight.com">www.orlight.com</a>   | Web:      |  |

Product Name: ORLRPVALUHS-TL15  
 Code:  
 Colour:  
 Finish:  
 Dimensions:  
 Colour Temp:  
 Notes:

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype



#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| <hr/> | <hr/>     | <hr/> |



**16 ORLRPVALUHS-TL - Standard Trimless Profile**

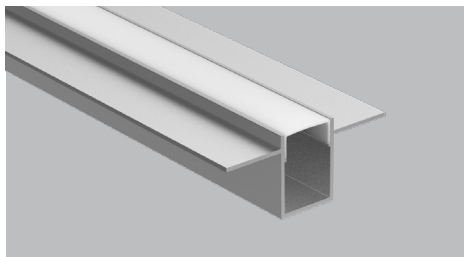

Standard trimless profile dedicated to the Orlight Standard and Evolution linear solution. The profile features an Aluminium construction, ideal for heat dissipation. Diffuser designed to eliminate LED trail.

Available in lengths up to 2 metres.



**17 ORLRPVALUHS-TL15 - Standard Trimless Profile**

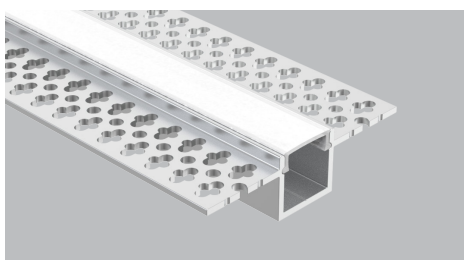

Standard trimless profile dedicated to the Orlight Standard and Evolution linear solution. The profile features an Aluminium construction ideal for dissipation with diffuser to eliminate LED trail.

Available in lengths up to 2 metres.



**18 ORLRPVALUHS-TLG - Trimless Groove LED Housing**

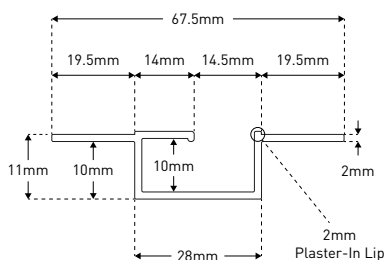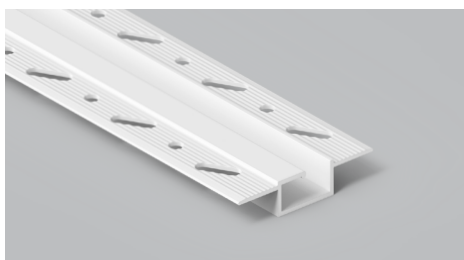

Trimless profile with a recessed groove provides an unique linear solution. The profile features an Aluminium construction and easy plaster texture and holes. The light source remains discreet to produce a wonderful thin blade of light.

Available in lengths up to 2 metres.



**19 ORLRPVALUHSEVOPL2-TL15 - EVOPLUS Trimless Profile**

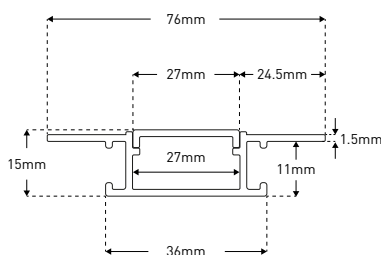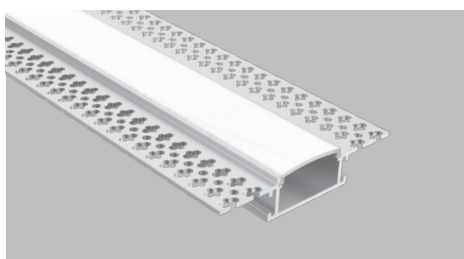

Trimless profile 15mm deep dedicated to the Orlight EVOPLUS 2, 3 and 4 linear solutions. The profile features an Aluminium construction, ideal for heat dissipation. Diffuser designed to eliminate LED trail.


Available in lengths up to 2 metres.

**20 ORLRPVHSEVOPL2-R - EVOPLUS Round Profile**

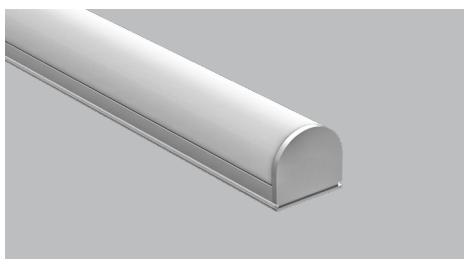

Round profile dedicated to the Orlight EVOPLUS 2, 3 and 4 linear solutions. The profile features an Aluminium construction ideal for heat dissipation with diffuser to eliminate LED trail. Available with fixing clip mechanism with 3M foam based adhesive for ease of installation.

Available in lengths up to 2 metres.

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |                       |
|-------------------|-----------------------|
| Reference Code:   | <b>L19</b>            |
| Item Description: | Surface Mounted Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | XAL  | Supplier: |  |
| Address:      | 23 Batemans Row, London EC2A 3HH                         | Address:  |  |
| Ph:           | 020 3174 0177  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:office.uk@xal.com">office.uk@xal.com</a> | Email:    |  |
| Web:          | <a href="http://www.xal.com">www.xal.com</a>             | Web:      |  |

|               |                                  |
|---------------|----------------------------------|
| Product Name: | Leno                             |
| Code:         |                                  |
| Colour:       | White                            |
| Finish:       |                                  |
| Dimensions:   | L1835 x W89 x D28                |
| Colour Temp:  | 3000K                            |
| Notes:        | To be fitted with Opal diffuser. |

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| <hr/> | <hr/>     | <hr/> |

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

RIBA   
 Chartered Practice



MEMBER



## Description

**EN** Low profile surface mounted luminaire, 28mm total height; suitable for wall or ceiling mounting; surface powder coated in white, grey or black; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light, directed downwards by LGP body (Light Guiding Prism) and highly efficient reflector; homogeneously illuminated, satinised (flush or jut-out) or microprismatic PMMA cover;  $UGR \leq 19$ ; energy-efficient LEDs with very good colour rendering; binning initial  $\leq 3$  MacAdam; available in the light colours 3000 K and 4000 K;  $CRI \geq 80$ ; min. 90 % of the luminous flux after 50 000 hours; degree of protection IP20; PC I; photobiological safety according to IEC 62471 risk group 0; DALI-2 control

**DE** Extrem flache Anbauleuchte mit 28mm Gesamthöhe; geeignet für die Wand- oder Deckenmontage; Oberfläche weiß, grau oder schwarz pulverbeschichtet; absturzesicherer Lichteinsatz aus stranggepresstem Aluminiumprofil werkzeuglos mittels Magnethalter in Kanal einsetzbar; seitlich eingekoppeltes Licht durch LGP-Body (Light-Guiding-Prism) und hocheffizientem Reflektor nach unten gelenkt; homogen ausgeleuchtete, satinierte (bündig oder herausragend) oder mikroprismatische Abdeckung aus PMMA;  $UGR \leq 19$ ; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Binning initial  $\leq 3$  MacAdam; lieferbar in den Lichtfarben 3000 K und 4000 K;  $CRI \geq 80$ ; min. 90 % des Lichtstromes nach 50 000h Lebensdauer; Schutzart IP20; SKI; photobiologische Sicherheit gemäß IEC 62471 Risikogruppe 0; DALI-2 Steuerung


## LENO

surface

## Quickinfo

3000 K, 4000 K  
 $CRI \geq 80$   
 L90 @ 50 000 h  
 up to 2130 lm/m  
 DALI-2  
 opal, microprismatic ( $UGR \leq 19$ ),  
 jut-out


## Types



## Colours



## Light distributions



## Order options

| COLOUR TEMPERATURE |   |
|--------------------|---|
| 3000K              | 5 |
| 4000K              | 6 |

## CONTROL

DALI-2

| MATERIAL COLOUR |   |
|-----------------|---|
| white           | 7 |
| grey            | G |
| black           | 8 |



7 G 8

| LIGHT OPTIC COVER         |   |
|---------------------------|---|
| opal high performance     | H |
| microprismatic (UGR ≤ 19) | G |
| jut-out                   | J |

## Options on request

## COLOUR RENDERING INDEX

CRI ≥ 90



## LENO surface




## LUMINAIRE



| SYS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|------------|
| 11W        | 3000K        | 1230lm    | 618    | 051-9112:3 |
|            | 4000K        | 1300lm    |        |            |
| 19W        | 3000K        | 2450lm    | 1226   | 051-9114:3 |
|            | 4000K        | 2600lm    |        |            |
| 29W        | 3000K        | 3680lm    | 1835   | 051-9116:3 |
|            | 4000K        | 3890lm    |        |            |
| 38W        | 3000K        | 4900lm    | 2443   | 051-9118:3 |
|            | 4000K        | 5190lm    |        |            |

luminous flux opal high performance, -5% microprismatic, -5% jut-out

## LIGHT DISTRIBUTION

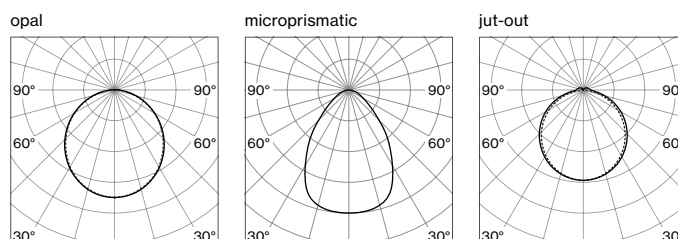

## Technical data



LENO surface, microprismatic, 19 W, 4000 K

## ROOM VALUES


|                    |                 |
|--------------------|-----------------|
| Room dimensions    | 5.4 × 4 × 2.8 m |
| Reflection factor  | 0.7   0.5   0.2 |
| Maintenance factor | 0.8             |

## CALCULATION SURFACE

|                                       |           |
|---------------------------------------|-----------|
| Surface dimensions                    | 1.6 × 0.8 |
| Surface height                        | 0.75      |
| Average illuminance (E <sub>m</sub> ) | > 500 lx  |
| Uniformity (U <sub>0</sub> )          | > 0.6     |

## GLARE EVALUATION

|  |      |
|--|------|
| Table Classification X=4H   Y=8H   S=0.25H |      |
| UGR transversal                            | < 19 |
| UGR axial                                  | < 19 |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |            |
|-------------------|------------|
| Reference Code:   | <b>L20</b> |
| Item Description: | Wall Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Luke Lamp Co.  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 914 294 2024   | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@lukelampco.com">info@lukelampco.com</a> | Email:    |  |
| Web:          | <a href="http://www.lukelampco.com">www.lukelampco.com</a>   | Web:      |  |

Product Name: 3.5ft Surrey Sconce  
 Code:  
 Colour:  
 Finish: Satin brass  
 Dimensions: H42" x W9" x D7"  
 Colour Temp: 3000K  
 Notes: Right orientation.

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| <hr/> | <hr/>     | <hr/> |

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice




MEMBER



Left Orientation



Right Orientation

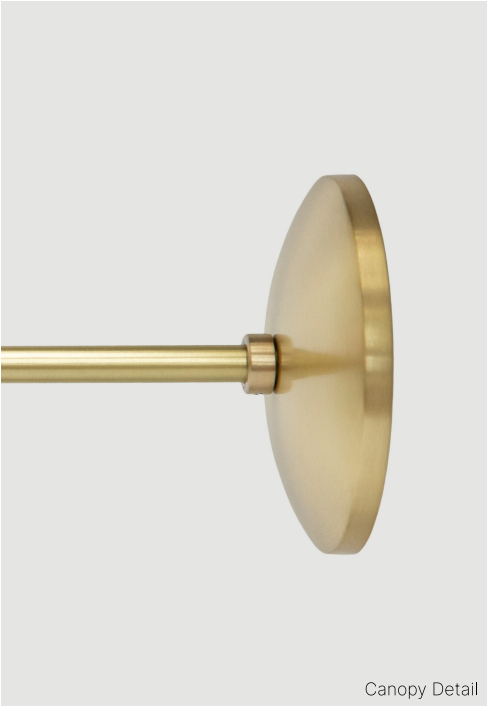

Canopy Detail

FIXTURE DETAILS

Dimensions

Fixture Height: 42 inches  
Fixture Width: 9 inches  
Fixture Depth: 7 inches

Mounting

Single junction box centered on the fixture.

Light Output

475 lumens delivered.  
14 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED. 95+ CRI. 50,000+ hour lifespan.

Orientation

Left or Right (see above)

ADA Compliance

Available upon request.

Finish

Satin brass, blackened brass, antique brass, raw brass, satin nickel, polished nickel, & satin copper. Powdercoated canopies upon request. See more at: [lukelampco.com/finishes](http://lukelampco.com/finishes)


Color Temperature

2700K standard. To request another color temperature, specify below.

Driver

Integral to jbox or remote. For more info, visit: [lukelampco.com/drivers](http://lukelampco.com/drivers)

DIMENSIONS

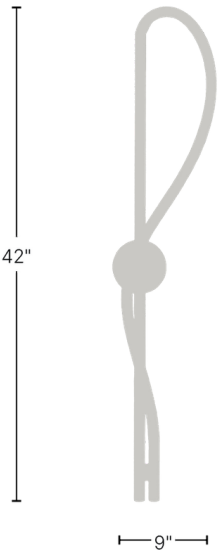

SPECIFYING CODE

| FIXTURE CODE   | ORIENTATION           | FINISH   | COLOR TEMPERATURE  | DRIVER  | CERTIFICATION   |
|----------------|-----------------------|--|--|---|---|
| 3.5FT - SR - S | -                     | -  | 27   | -   | -   |
|                | L - Left<br>R - Right | SB - Satin Brass<br>BB - Blackened Brass<br>AB - Antique Brass<br>RB - Raw Brass<br>SN - Satin Nickel<br>PN - Polished Nickel<br>SC - Satin Copper | 24 - 2400K<br>27 - 2700K<br>30 - 3000K<br>35 - 3500K<br>42 - 4200K<br>50 - 5000K | 10 - 0-10V (120-277V)<br>TR - TRIAC (120V)<br>IN - Integral to jbox (120V)<br>SW - Switchex (120V)<br><br>For more info, visit:<br><a href="http://lukelampco.com/drivers">lukelampco.com/drivers</a> | DR - UL Dry Location<br>WT - UL Wet Location<br>CE - CE Certified*<br><br>* If CE is specified, we cannot supply the drivers. |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |               |
|-------------------|---------------|
| Reference Code:   | <b>L21</b>    |
| Item Description: | Pendant Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Luke Lamp Co.  | Supplier: |  |
| Address:      |  | Address:  |  |
| Ph:           | 914 294 2024   | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:info@lukelampco.com">info@lukelampco.com</a> | Email:    |  |
| Web:          | <a href="http://www.lukelampco.com">www.lukelampco.com</a>   | Web:      |  |

Product Name: 6ft Tracer Bar II (Standard Rope)

Code:

Colour:

Finish: Satin brass

Dimensions: L6' x H18"

Colour Temp: 3000K

Notes:

Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| <hr/> | <hr/>     | <hr/> |

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU

Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)


© Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.

Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

RIBA   
Chartered Practice



MEMBER

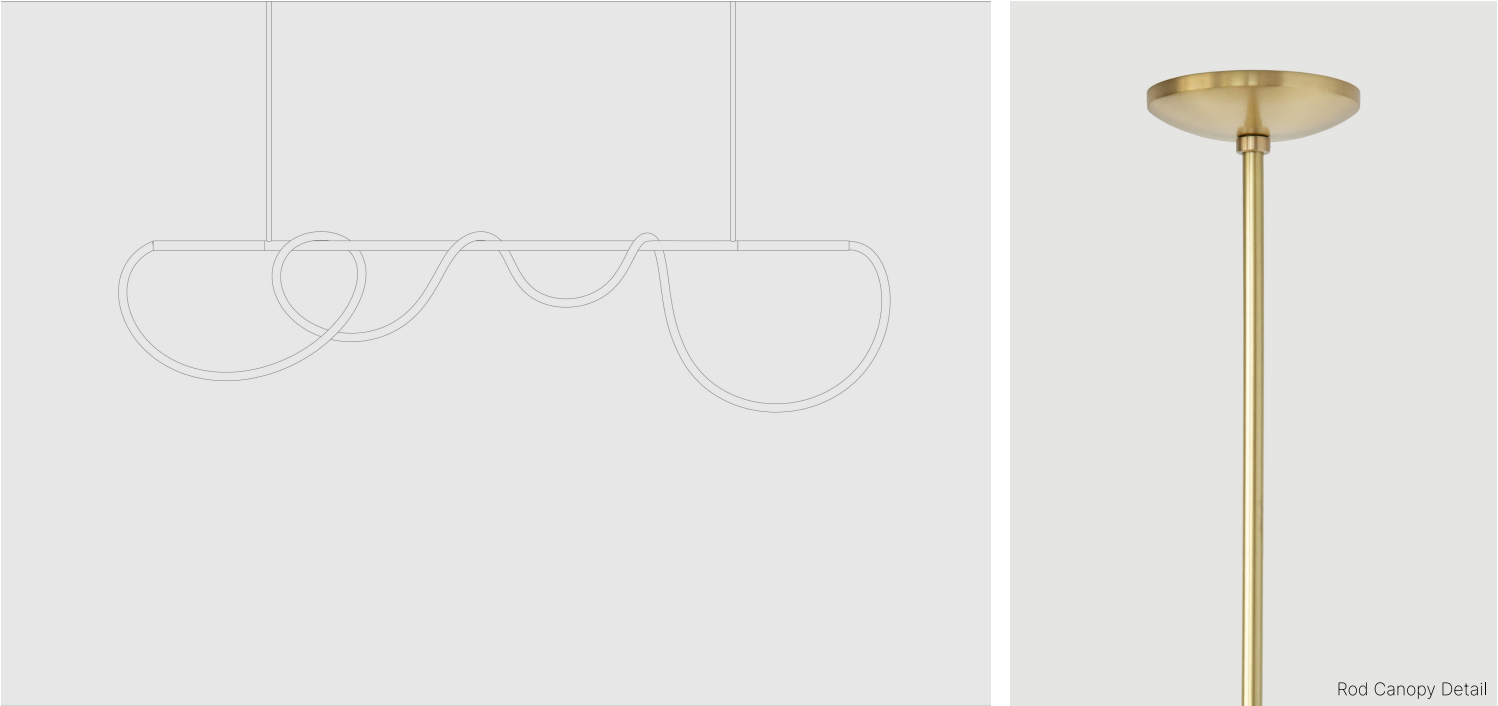

FIXTURE DETAILS

Dimensions

Fixture Length: 6 feet  
Fixture Height: 18 inches

Mounting

Two junction boxes (48in. on center). One requires power, one is for suspension only.

Light Output

1750 lumens delivered.  
51 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED. 95+ CRI. 50,000+ hour lifespan.

Vertical Rod Height

6in - 72in (cut to order). This length is not field-adjustable. The Vertical Rod Height plus the Fixture Height equals the overall drop of the fixture (see Terms Explained diagram).

Finish

Satin brass, blackened brass, antique brass, raw brass, satin nickel, polished nickel, & satin copper. Powdercoated canopies upon request. See more at: [lukelampco.com/finishes](http://lukelampco.com/finishes)


Color Temperature

2700K standard. To request another color temperature, specify below.

Driver

Integral or Remote. For more info, visit: [lukelampco.com/drivers](http://lukelampco.com/drivers)

TERMS EXPLAINED

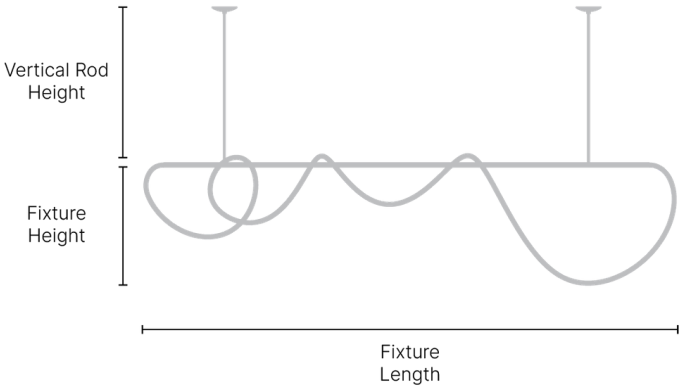


SPECIFYING CODE

Diagram for reference only. Not to scale.

| FIXTURE CODE   | VERTICAL ROD HEIGHT | FINISH | COLOR TEMPERATURE | DRIVER | CERTIFICATION |
|--|---------------------|--------|-------------------|--------|---------------|
| 6FT - TBII - SR  | -                   | -      | 27                | -      | -             |
| <div><div><div>__IN- 6in to 72in long, cut to order. This length is not field-adjustable.</div><div><div>SB - Satin Brass</div><div>BB - Blackened Brass</div><div>AB - Antique Brass</div><div>RB - Raw Brass</div><div>SN - Satin Nickel</div><div>PN - Polished Nickel</div><div>SC - Satin Copper</div></div><div><div>24 - 2400K</div><div>27 - 2700K</div><div>30 - 3000K</div><div>35 - 3500K</div><div>42 - 4200K</div><div>50 - 5000K</div></div><div><div></div><div>For more info, visit: <a href="http://lukelampco.com/drivers">lukelampco.com/drivers</a></div></div><div><div>10 - 0-10V</div><div>TR - TRIAC</div><div>IN - Integral</div><div>SW - Switchex</div></div><div><div>DR - UL Dry Location</div><div>WT - UL Wet Location</div><div>CE - CE Certified*</div><div>* If CE is specified, we cannot supply the drivers.</div></div></div></div> |                     |        |                   |        |               |



|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Finishes Schedule</b> | Revision<br>00           |   |

|                   |                 |
|-------------------|-----------------|
| Reference Code:   | <b>L22</b>      |
| Item Description: | Suspended Light |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | XAL  | Supplier: |  |
| Address:      | 23 Batemans Row, London EC2A 3HH                         | Address:  |  |
| Ph:           | 020 3174 0177  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:office.uk@xal.com">office.uk@xal.com</a> | Email:    |  |
| Web:          | <a href="http://www.xal.com">www.xal.com</a>             | Web:      |  |

Product Name: Task S Suspended System  
Code:  
Colour: White  
Finish:  
Dimensions: Varies  
Colour Temp:  
Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| <hr/> | <hr/>     | <hr/> |

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
© Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
Chartered Practice



MEMBER



## Description

**EN** Luminaire housing made of aluminium with rounded edges; different versions: choice of rectangular, L-shaped or quarter circle segment design; ultra low-profile design (only 15 mm); for continuous lighting systems; surface powder coated in white or black; suspended luminaire system with 1500 mm cord suspension; with integrated tool-less suspension height adjustment; convenient quick mounting system without tools; direct or direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed downwards or up and down by laser engraving; light control via highly reflective reflector material; optional: indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; microprismatic PMMA cover; completely homogeneous illumination; workplace luminaire suitable for VDUs according to DIN EN 12464-1 ( $UGR \leq 19$ ); efficient LEDs with very good colour rendering; binning initial  $\leq 3$  MacAdam; light colour 3000 K or 4000 K;  $CRI \geq 80$  or  $CRI \geq 90$ ; L95 / 50 000 h; canopy for through wiring; IP20; PCI; photobiological safety according to IEC 62471 risk group 0; optionally non-dimmable, DALI-2 control with CLO function or dimmable with integrated infrared presence and brightness sensor (DALI-2); sound absorbing accessories available

**DE** Leuchtenkörper aus Aluminium mit abgerundeten Kanten; unterschiedliche Varianten: Bauform wahlweise rechteckig, L-förmig oder als Viertelkreis-Segment; extrem flache Bauform (nur 15 mm); für durchgehende Lichtsysteme; Oberfläche weiß oder schwarz pulverbeschichtet; Pendelleuchtersystem mit 1500 mm Seilabhängung; werkzeuglose Höhenverstellung an der Leuchte; komfortables, werkzeugloses Schnellmontagesystem; direkte bzw. direkt/indirekte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach unten bzw. oben und unten gelenkt; Lichtlenkung mittels hochreflektierenden Reflektormaterials; optional: Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom und maximale Deckenaufhellung; mikroprismatische PMMA-Abdeckung; absolut homogene Ausleuchtung; bildschirmtaugliche Arbeitsplatzleuchte nach DIN EN 12464-1 ( $UGR \leq 19$ ); effiziente LEDs mit sehr guter Farbwiedergabe; Binning initial  $\leq 3$  MacAdam; Lichtfarbe 3000 K oder 4000 K;  $CRI \geq 80$  oder  $CRI \geq 90$ ; L95 / 50 000 h; Baldachin für Durchgangsverdrahtung; IP20; SK I; photobiologische Sicherheit gemäß IEC 62471 Risikogruppe 0; wahlweise nicht dimmbar, DALI-2 Steuerung mit CLO-Funktion oder dimmbar mit integriertem Infrarot Anwesenheits- und Helligkeitssensor; schallabsorbierendes Zubehör erhältlich


## TASK S system

suspended

## Quickinfo

3000 K, 4000 K  
 $CRI \geq 80$ ,  $CRI \geq 90$   
 L95 @ 50 000 h  
 $UGR \leq 19$  /  $65^\circ \leq 3000 \text{ cd/m}^2$   
 L 1190 up to  $\downarrow 3920 / \uparrow 2110 \text{ lm}$   
 L 1790 up to  $\downarrow 5880 / \uparrow 3170 \text{ lm}$   
 L 2390 up to  $\downarrow 7850 / \uparrow 4220 \text{ lm}$   
 non DIM, DALI-2/CLO, DALI sensor  
 microprismatic ( $UGR \leq 19$ )

## Types

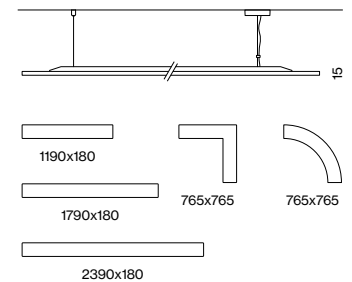

## Colours



## Light distribution



## Order options

### COLOUR TEMPERATURE

|                   |   |
|-------------------|---|
| 3000 K (CRI ≥ 90) | 0 |
| 4000 K (CRI ≥ 90) | 1 |
| 3000 K (CRI ≥ 80) | 5 |
| 4000 K (CRI ≥ 80) | 6 |

### CONTROL

|              |   |
|--------------|---|
| non DIM      | 1 |
| DALI-2/CLO   | 3 |
| DALI sensor* | 7 |

\*version with sensor: length + 9 mm

### MATERIAL COLOUR


|       |   |
|-------|---|
| white | 7 |
| black | 8 |

7 8


## Options on request

### COLOUR TEMPERATURE

tunable white (2700 – 6500 K)




## TASK S LINEAR suspended



### DIRECT

| SYS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE              |
|------------|--------------|-----------|--------|-------------------------|
| 15 W       | 3000 K       | 1890 lm   | 1180   | 0 5 9 - 5 7 4 4 : : : P |
|            | 4000 K       | 1990 lm   |        |                         |
| 22 W       | 3000 K       | 2840 lm   | 1748   | 0 5 9 - 5 7 4 6 : : : P |
|            | 4000 K       | 2990 lm   |        |                         |
| 29 W       | 3000 K       | 3790 lm   | 2315   | 0 5 9 - 5 7 4 8 : : : P |
|            | 4000 K       | 3990 lm   |        |                         |

order luminaire + mounting accessories separately



### DIRECT / INDIRECT SOFT


| SYS. POWER | COLOUR TEMP. | LUM. FLUX         | L (mm) | ORDER CODE              |
|------------|--------------|-------------------|--------|-------------------------|
| 19 W       | 3000 K       | ↓ 2130 / ↑ 431 lm | 1180   | 0 5 9 - 5 7 5 4 : : : P |
|            | 4000 K       | ↓ 2240 / ↑ 452 lm |        |                         |
| 29 W       | 3000 K       | ↓ 3190 / ↑ 644 lm | 1748   | 0 5 9 - 5 7 5 6 : : : P |
|            | 4000 K       | ↓ 3360 / ↑ 680 lm |        |                         |
| 38 W       | 3000 K       | ↓ 4250 / ↑ 860 lm | 2315   | 0 5 9 - 5 7 5 8 : : : P |
|            | 4000 K       | ↓ 4480 / ↑ 907 lm |        |                         |



### DIRECT / INDIRECT POWER

| SYS. POWER | COLOUR TEMP. | LUM. FLUX          | L (mm) | ORDER CODE              |
|------------|--------------|--------------------|--------|-------------------------|
| 44 W       | 3000 K       | ↓ 3720 / ↑ 2000 lm | 1180   | 0 5 9 - 5 7 6 4 : : : P |
|            | 4000 K       | ↓ 3920 / ↑ 2110 lm |        |                         |
| 66 W       | 3000 K       | ↓ 5580 / ↑ 3010 lm | 1748   | 0 5 9 - 5 7 6 6 : : : P |
|            | 4000 K       | ↓ 5880 / ↑ 3170 lm |        |                         |
| 88 W       | 3000 K       | ↓ 7440 / ↑ 4010 lm | 2315   | 0 5 9 - 5 7 6 8 : : : P |
|            | 4000 K       | ↓ 7850 / ↑ 4220 lm |        |                         |

## Technical data



**TASK system** linear, 19 W, 4000 K  
direct / indirect soft

### ROOM VALUES

|                    |                 |
|--------------------|-----------------|
| Room dimensions    | 9 × 5 × 2.8 m   |
| Reflection factor  | 0.7   0.5   0.2 |
| Maintenance factor | 0.8             |
| Mounting height    | 2.25 m          |

### CALCULATION SURFACE

|                                       |           |
|---------------------------------------|-----------|
| Surface dimensions                    | 7 × 3.5 m |
| Surface height                        | 0.75 m    |
| Average illuminance (E <sub>m</sub> ) | > 500 lx  |

### GLARE EVALUATION

|  |      |
|--|------|
| Table Classification X=4H   Y=8H   S=0.25H |      |
| UGR transversal                            | < 19 |
| UGR axial                                  | < 19 |

## Mounting accessories

### LINEAR CONNECTOR

| TYPE  | ORDER CODE              |
|---|-------------------------|
| with through-wiring (max. 500 W)                    | 0 5 9 - 2 7 9 2 3 1 : P |
| without through-wiring                              | 0 5 9 - 2 7 9 2 4 1 : P |
| with power feeder 3 × 1.5 mm <sup>2</sup> (non DIM) | 0 5 9 - 2 7 9 2 5 2 : P |
| with power feeder 5 × 1.5 mm <sup>2</sup> (DALI-2)  | 0 5 9 - 2 7 9 2 5 1 : P |

### CORNER CONNECTOR

| TYPE                                 | ORDER CODE              |
|--------------------------------------|-------------------------|
| 90° with through-wiring (max. 500 W) | 0 5 9 - 2 7 9 2 7 1 : P |
| 90° without through-wiring           | 0 5 9 - 2 7 9 2 8 1 : P |

### LONG LINEAR CONNECTOR

| TYPE   | ORDER CODE              |
|--|-------------------------|
| with through-wiring / L = 800 mm             | 0 5 9 - 2 7 9 2 3 2 : P |
| with through-wiring / L = 1200 mm            | 0 5 9 - 2 7 9 2 3 3 : P |
| with through-wiring / L = 1200 mm custom cut | 0 5 9 - 2 7 9 2 3 0 : P |
| with through-wiring / L = 2400 mm custom cut | 0 5 9 - 2 7 9 2 3 4 : P |
| flexible cable suspension 1500 mm            | 0 5 9 - 2 7 9 2 1 2 7   |

max. 500 W

### CABLE SUSPENSION / POWER FEEDER

| TYPE   | L (mm) | ORDER CODE              |
|--|--------|-------------------------|
| cable suspension                               | 1500   | 0 5 9 - 2 7 9 2 1 1 : P |
| power feeder 3 × 1.5 mm <sup>2</sup> (non DIM) | 1500   | 0 5 9 - 2 7 9 2 2 2 : P |
| power feeder 5 × 1.5 mm <sup>2</sup> (DALI-2)  | 1500   | 0 5 9 - 2 7 9 2 2 1 : P |

## Order options

## CORNER



|                      |   |
|----------------------|---|
| without power feeder | 2 |
| with power feeder    | 3 |

## COLOUR TEMPERATURE



|                   |   |
|-------------------|---|
| 3000 K (CRI ≥ 90) | 0 |
| 4000 K (CRI ≥ 90) | 1 |
| 3000 K (CRI ≥ 80) | 5 |
| 4000 K (CRI ≥ 80) | 6 |

## CONTROL




|            |   |
|------------|---|
| non DIM    | 1 |
| DALI-2/CLO | 3 |

## MATERIAL COLOUR



|       |   |
|-------|---|
| white | 7 |
| black | 8 |

7 8

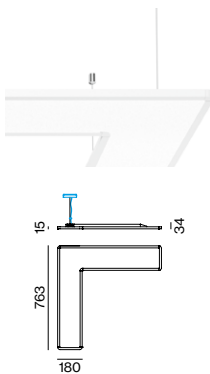

## TASK S CORNER suspended

incl. cable suspension 1500 mm



## DIRECT

| SYS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE            |
|------------|--------------|-----------|--------|-----------------------|
| 16 W       | 3000 K       | 2000lm    | 765    | 0 5 9 - 5 8 4 ⚡ ⚡ ⚡ P |
|            | 4000 K       | 2100lm    |        |                       |




## DIRECT / INDIRECT SOFT

| SYS. POWER | COLOUR TEMP. | LUM. FLUX        | L (mm) | ORDER CODE            |
|------------|--------------|------------------|--------|-----------------------|
| 22 W       | 3000 K       | ↓ 2520 / ↑ 464lm | 765    | 0 5 9 - 5 8 5 ⚡ ⚡ ⚡ P |
|            | 4000 K       | ↓ 2650 / ↑ 489lm |        |                       |



## DIRECT / INDIRECT POWER

| SYS. POWER | COLOUR TEMP. | LUM. FLUX         | L (mm) | ORDER CODE            |
|------------|--------------|-------------------|--------|-----------------------|
| 51 W       | 3000 K       | ↓ 4250 / ↑ 2260lm | 765    | 0 5 9 - 5 8 6 ⚡ ⚡ ⚡ P |
|            | 4000 K       | ↓ 4480 / ↑ 2380lm |        |                       |



## TASK S CURVE suspended

incl. cable suspension 1500 mm



## DIRECT

| SYS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE              |
|------------|--------------|-----------|--------|-------------------------|
| 13 W       | 3000 K       | 1700lm    | 765    | 0 5 9 - 5 5 4 2 ⚡ ⚡ ⚡ P |
|            | 4000 K       | 1790lm    |        |                         |




## DIRECT / INDIRECT POWER

| SYS. POWER | COLOUR TEMP. | LUM. FLUX         | L (mm) | ORDER CODE              |
|------------|--------------|-------------------|--------|-------------------------|
| 44 W       | 3000 K       | ↓ 3620 / ↑ 1930lm | 765    | 0 5 9 - 5 5 6 2 ⚡ ⚡ ⚡ P |
|            | 4000 K       | ↓ 3810 / ↑ 2030lm |        |                         |


## LIGHT DISTRIBUTION

microprismatic




direct

microprismatic




direct/indirect soft

microprismatic




direct/indirect power

Technical data

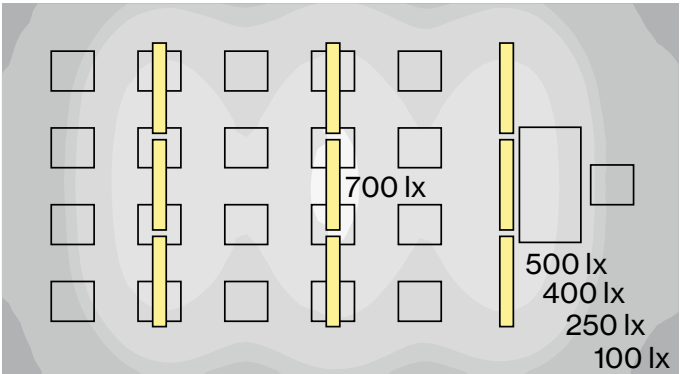

|   |                 |
|---|-----------------|
| <b>TASK system</b> linear, 19 W, 4000 K<br>direct/indirect soft |                 |
| <b>ROOM VALUES</b>  |                 |
| Room dimensions   | 9 × 5 × 2.8 m   |
| Reflection factor   | 0.7   0.5   0.2 |
| Maintenance factor  | 0.8             |
| Mounting height   | 2.25 m          |
| <b>CALCULATION SURFACE</b>                                      |                 |
| Surface dimensions  | 7 × 3.5 m       |
| Surface height  | 0.75 m          |
| Average illuminance (E <sub>m</sub> )                           | > 500 lx        |
| <b>GLARE EVALUATION</b>   |                 |
| Table Classification X=4H   Y=8H   S=0.25H                      |                 |
| UGR transversal   | < 19            |
| UGR axial   | < 19            |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                    |
|-------------------|--------------------|
| Reference Code:   | <b>L23</b>         |
| Item Description: | Decorative Pendant |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Flos   | Supplier: | Atrium   |
| Address:      |  | Address:  | 28 Leonard St, London EC2A 4BY                           |
| Ph:           |  | Ph:       |  |
| Contact:      |  | Contact:  | 020 7681 9933  |
| Email:        |  | Email:    |  |
| Web:          | <a href="http://www.flos.com">www.flos.com</a> | Web:      | <a href="http://www.atrium.ltd.uk">www.atrium.ltd.uk</a> |

Product Name: Noctambule Suspension 4 High Cylinder  
 Code:  
 Colour: Black  
 Finish:  
 Dimensions: OD250 x H2160mm  
 Colour Temp: 2700K  
 Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| _____ | _____     | _____ |

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

RIBA   
 Chartered Practice



MEMBER






## Noctambule Suspension 4 High Cylinder

by Konstantin Grcic , 2019

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.



|                                |                                       |
|--------------------------------|---------------------------------------|
| <b>Mounting</b>                | Pendant                               |
| <b>Environment</b>             | Indoor                                |
| <b>Weight</b>                  | 20,7 Kg                               |
| <b>Light sources available</b> | 5 x Strip Led x 9W 2700K 1500lm CRI90 |
| <b>Emergency</b>               | Without                               |
| <b>Switching</b>               | Yes                                   |
| <b>Dimmer</b>                  | Included                              |
| <b>Voltage</b>                 | 100-240V                              |
| <b>Power</b>                   | 45W                                   |
| <b>Battery</b>                 | No                                    |
| <b>Supply included</b>         | Yes                                   |
| <b>Cord Length</b>             | 4000 mm                               |
| <b>Materials</b>               | Blown crystal, Die-cast aluminum      |
| <b>Colors</b>                  | ● F0280000 - Black                    |



|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                    |
|-------------------|--------------------|
| Reference Code:   | <b>L24</b>         |
| Item Description: | Decorative Pendant |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Flos   | Supplier: | Atrium   |
| Address:      |  | Address:  | 28 Leonard St, London EC2A 4BY                           |
| Ph:           |  | Ph:       |  |
| Contact:      |  | Contact:  | 020 7681 9933  |
| Email:        |  | Email:    |  |
| Web:          | <a href="http://www.flos.com">www.flos.com</a> | Web:      | <a href="http://www.atrium.ltd.uk">www.atrium.ltd.uk</a> |

Product Name: Noctambule Suspension 6 High Cylinder  
Code:  
Colour: Black  
Finish:  
Dimensions: OD250 x H3220mm  
Colour Temp: 2700K  
Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:


|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| <hr/> | <hr/>     | <hr/> |



## Noctambule Suspension 6 High Cylinder

by Konstantin Grcic , 2019

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.



|                                |                                       |
|--------------------------------|---------------------------------------|
| <b>Mounting</b>                | Pendant                               |
| <b>Environment</b>             | Indoor                                |
| <b>Weight</b>                  | 29,7 Kg                               |
| <b>Light sources available</b> | 7 x Strip Led x 9W 2700K 2096lm CRI90 |

|                        |          |
|------------------------|----------|
| <b>Emergency</b>       | Without  |
| <b>Switching</b>       | Yes      |
| <b>Dimmer</b>          | Included |
| <b>Voltage</b>         | 100-240V |
| <b>Power</b>           | 63W      |
| <b>Battery</b>         | No       |
| <b>Supply included</b> | Yes      |

|                    |                                  |
|--------------------|----------------------------------|
| <b>Cord Length</b> | 4000 mm                          |
| <b>Materials</b>   | Blown crystal, Die-cast aluminum |

|               |                    |
|---------------|--------------------|
| <b>Colors</b> | ● F0282000 - Black |
|---------------|--------------------|



|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                    |
|-------------------|--------------------|
| Reference Code:   | <b>L25</b>         |
| Item Description: | Decorative Pendant |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Flos   | Supplier: | Atrium   |
| Address:      |  | Address:  | 28 Leonard St, London EC2A 4BY                           |
| Ph:           |  | Ph:       |  |
| Contact:      |  | Contact:  | 020 7681 9933  |
| Email:        |  | Email:    |  |
| Web:          | <a href="http://www.flos.com">www.flos.com</a> | Web:      | <a href="http://www.atrium.ltd.uk">www.atrium.ltd.uk</a> |

Product Name: Noctambule Suspension 5 High Cylinder  
 Code:  
 Colour: Black  
 Finish:  
 Dimensions: OD250 x H2690mm  
 Colour Temp: 2700K  
 Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice




MEMBER



## Noctambule Suspension 5 High Cylinder


by Konstantin Grcic , 2019

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.



|                                |                                       |
|--------------------------------|---------------------------------------|
| <b>Mounting</b>                | Pendant                               |
| <b>Environment</b>             | Indoor                                |
| <b>Weight</b>                  | 25,2 Kg                               |
| <b>Light sources available</b> | 6 x Strip Led x 9W 2700K 1798lm CRI90 |
| <b>Emergency</b>               | Without                               |
| <b>Switching</b>               | Yes                                   |
| <b>Dimmer</b>                  | Included                              |
| <b>Voltage</b>                 | 100-240V                              |
| <b>Power</b>                   | 54W                                   |
| <b>Battery</b>                 | No                                    |
| <b>Supply included</b>         | Yes                                   |
| <b>Cord Length</b>             | 4000 mm                               |
| <b>Materials</b>               | Blown crystal, Die-cast aluminum      |
| <b>Colors</b>                  | ● F0281000 - Black                    |



|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |  |
|-------------------|--|
| Reference Code:   | <b>L26</b>                               |
| Item Description: | Floor Lamp (South Reception East Lounge) |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Vibia  | Supplier: | Viaduct  |
| Address:      |  | Address:  | 1-10 Summers St, London EC1R 5BD                         |
| Ph:           |  | Ph:       |  |
| Contact:      |  | Contact:  | 020 7278 8456  |
| Email:        |  | Email:    |  |
| Web:          | <a href="http://www.vibia.com">www.vibia.com</a> | Web:      | <a href="http://www.viaduct.co.uk">www.viaduct.co.uk</a> |

Product Name: Flat Floor Lamp  
 Code:  
 Colour: Grey NCS S 1000-N  
 Finish:  
 Dimensions: W640 x D760 x H900mm  
 Colour Temp:  
 Notes:

#### Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

#### SHHARCHITECTS|INTERIORDESIGNERS

1 Vencourt Place, Ravenscourt Park, Hammersmith, London W6 9NU  
 Phone +44 (0) 20 8600 4171 Email [info@shh.co.uk](mailto:info@shh.co.uk) Website [shh.co.uk](http://shh.co.uk)  
 © Spence Harris Hogan Limited 2012. Registered address as above. Registered in England & Wales. Registered No 261 0615.  
 Vat No 627 9283 07. SHH is the trading name of Spence Harris Hogan Limited.

**RIBA**   
 Chartered Practice



MEMBER



# Flat

Design by Ichiro Iwasaki.

## Reference

**5945.**

## Application

Floor Lamps

## Installation type

Surface

## Description

The Flat floor lamp offers multiple functionality; material and light are integrated in a single body. The Flat collection contains various planes of light that rise up to become self-illuminating supports.

## Diffuser

Polycarbonate diffuser

## Materials

Body: Steel

Base: Steel

Head: Aluminium

Reflector: Aluminum

## Finish




**5945-13** Grey L1 (NCS S 1000-N)



**5945-47** Green L1 (NCS S 4005-G80Y)

## Sketch



## Electrical characteristics

2 x LED PLATE 7W 400mA



Total 14.0 W



# VIBIA



**Light source:** 2700K CRI >90 2400 lm 171 lm/W

**Driver included:** CC - Constant Current 400 mA 100~240V 50/60Hz

**Electronic dimming** PUSH

## Technical characteristics

- 24V transformer at plug

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.4976 m³ /

Gross weight 15.9 kg. / Net weight 15.3 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



## Photometric data

Efficiency : 64.98 lm/W

Coordinate system : CG

Total flux : 1280.18 lm

Maximum value : 343.56 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : floor

Light position :

X=0.00m Y=0.00m Z=2.50m

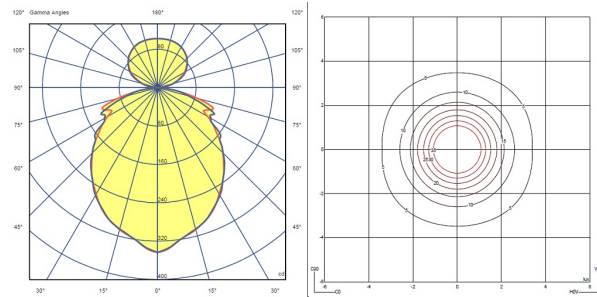

## Certificates



|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |            |
|-------------------|------------|
| Reference Code:   | <b>L27</b> |
| Item Description: | Table Lamp |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Vibia  | Supplier: | Viaduct  |
| Address:      |  | Address:  | 1-10 Summers St, London EC1R 5BD                         |
| Ph:           |  | Ph:       |  |
| Contact:      |  | Contact:  | 020 7278 8456  |
| Email:        |  | Email:    |  |
| Web:          | <a href="http://www.wastberg.com">www.wastberg.com</a> | Web:      | <a href="http://www.viaduct.co.uk">www.viaduct.co.uk</a> |

Product Name: w152 Busby i1  
 Code:  
 Colour: Black  
 Finish:  
 Dimensions: W168 x D75 x H200mm  
 Colour Temp:  
 Notes: Incorporates 3no. USB ports.



Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:


- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|       |           |       |
|-------|-----------|-------|
| Name: | Signature | Date: |
| _____ | _____     | _____ |

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                         |
|-------------------|-------------------------|
| Reference Code:   | <b>L28</b>              |
| Item Description: | Illuminated Escape Sign |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Philip Payne Ltd   | Supplier: |  |
| Address:      | Thornhill Road, Solihull B91 2HB                                     | Address:  |  |
| Ph:           | 0121 705 2384  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:sales@philippayne.co.uk">sales@philippayne.co.uk</a> | Email:    |  |
| Web:          | <a href="http://www.philippayne.co.uk">www.philippayne.co.uk</a>     | Web:      |  |

Product Name: 250MCRH Mini Cylinder  
 Code:  
 Colour:  
 Finish: Satin Chrome  
 Dimensions: H155 legend  
 Colour Temp:  
 Notes:



Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                         |
|-------------------|-------------------------|
| Reference Code:   | <b>L29</b>              |
| Item Description: | Illuminated Escape Sign |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Philip Payne Ltd   | Supplier: |  |
| Address:      | Thornhill Road, Solihull B91 2HB                                     | Address:  |  |
| Ph:           | 0121 705 2384  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:sales@philippayne.co.uk">sales@philippayne.co.uk</a> | Email:    |  |
| Web:          | <a href="http://www.philippayne.co.uk">www.philippayne.co.uk</a>     | Web:      |  |

Product Name: 250MCRV Mini Cylinder  
Code:  
Colour:  
Finish: Satin Chrome  
Dimensions: H155 legend  
Colour Temp:  
Notes:



Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|

|                          |                                   |                          |   |
|--------------------------|-----------------------------------|--------------------------|---|
| Project No<br><b>936</b> | Project<br>65 Fleet Street        | Issue Date<br>30.04.2021 |  |
| Document<br>702          | Title<br><b>Lighting Schedule</b> | Revision<br>00           |   |

|                   |                         |
|-------------------|-------------------------|
| Reference Code:   | <b>L30</b>              |
| Item Description: | Illuminated Escape Sign |

|               |  |           |  |
|---------------|--|-----------|--|
| Manufacturer: | Philip Payne Ltd   | Supplier: |  |
| Address:      | Thornhill Road, Solihull B91 2HB                                     | Address:  |  |
| Ph:           | 0121 705 2384  | Ph:       |  |
| Contact:      |  | Contact:  |  |
| Email:        | <a href="mailto:sales@philippayne.co.uk">sales@philippayne.co.uk</a> | Email:    |  |
| Web:          | <a href="http://www.philippayne.co.uk">www.philippayne.co.uk</a>     | Web:      |  |

Product Name: 300CANTI  
 Code:  
 Colour:  
 Finish: Satin Chrome  
 Dimensions: H155 legend  
 Colour Temp:  
 Notes:



Samples & certification required to be issued by Contractor to SHH for approval prior to ordering & fabrication:

- ☒ Product Sample Sample
- ☐ Cutting
- ☐ Shop Drawing
- ☐ Fire Test Certificate
- ☐ BREEAM / Green Guide Certification
- ☐ Seaming Diagram
- ☐ VOC Certification
- ☐ Prototype

#### GENERAL NOTES:

- 1 All materials must be contract grade, suitable for contract application, and meet the Operators requirements.
- 2 All materials to be installed and sealed in strict accordance with manufacturers/suppliers instructions.
- 3 All stone slabs to be inspected by SHH and approved Client prior to procurement.
- 4 Images are for reference only and do not necessarily match actual specifications.
- 5 Substitution of finishes or materials will not be accepted without the written approval of both SHH and the Client.
- 6 Unless indicated otherwise all samples submitted by contractor for approval to be a minimum of 300 x 300mm.
- 7 All quantities and locations of finishes to be verified by Contractor.
- 8 It is the Contractor / Suppliers responsibility to cross reference drawings and confirm quantities.
- 9 All products and materials are to comply with Fire and Health & Safety Regulations.

#### CLIENT SIGN OFF:

|             |                 |             |
|-------------|-----------------|-------------|
| Name: _____ | Signature _____ | Date: _____ |
|-------------|-----------------|-------------|