



TOILETS & SUPPORT DETAILS

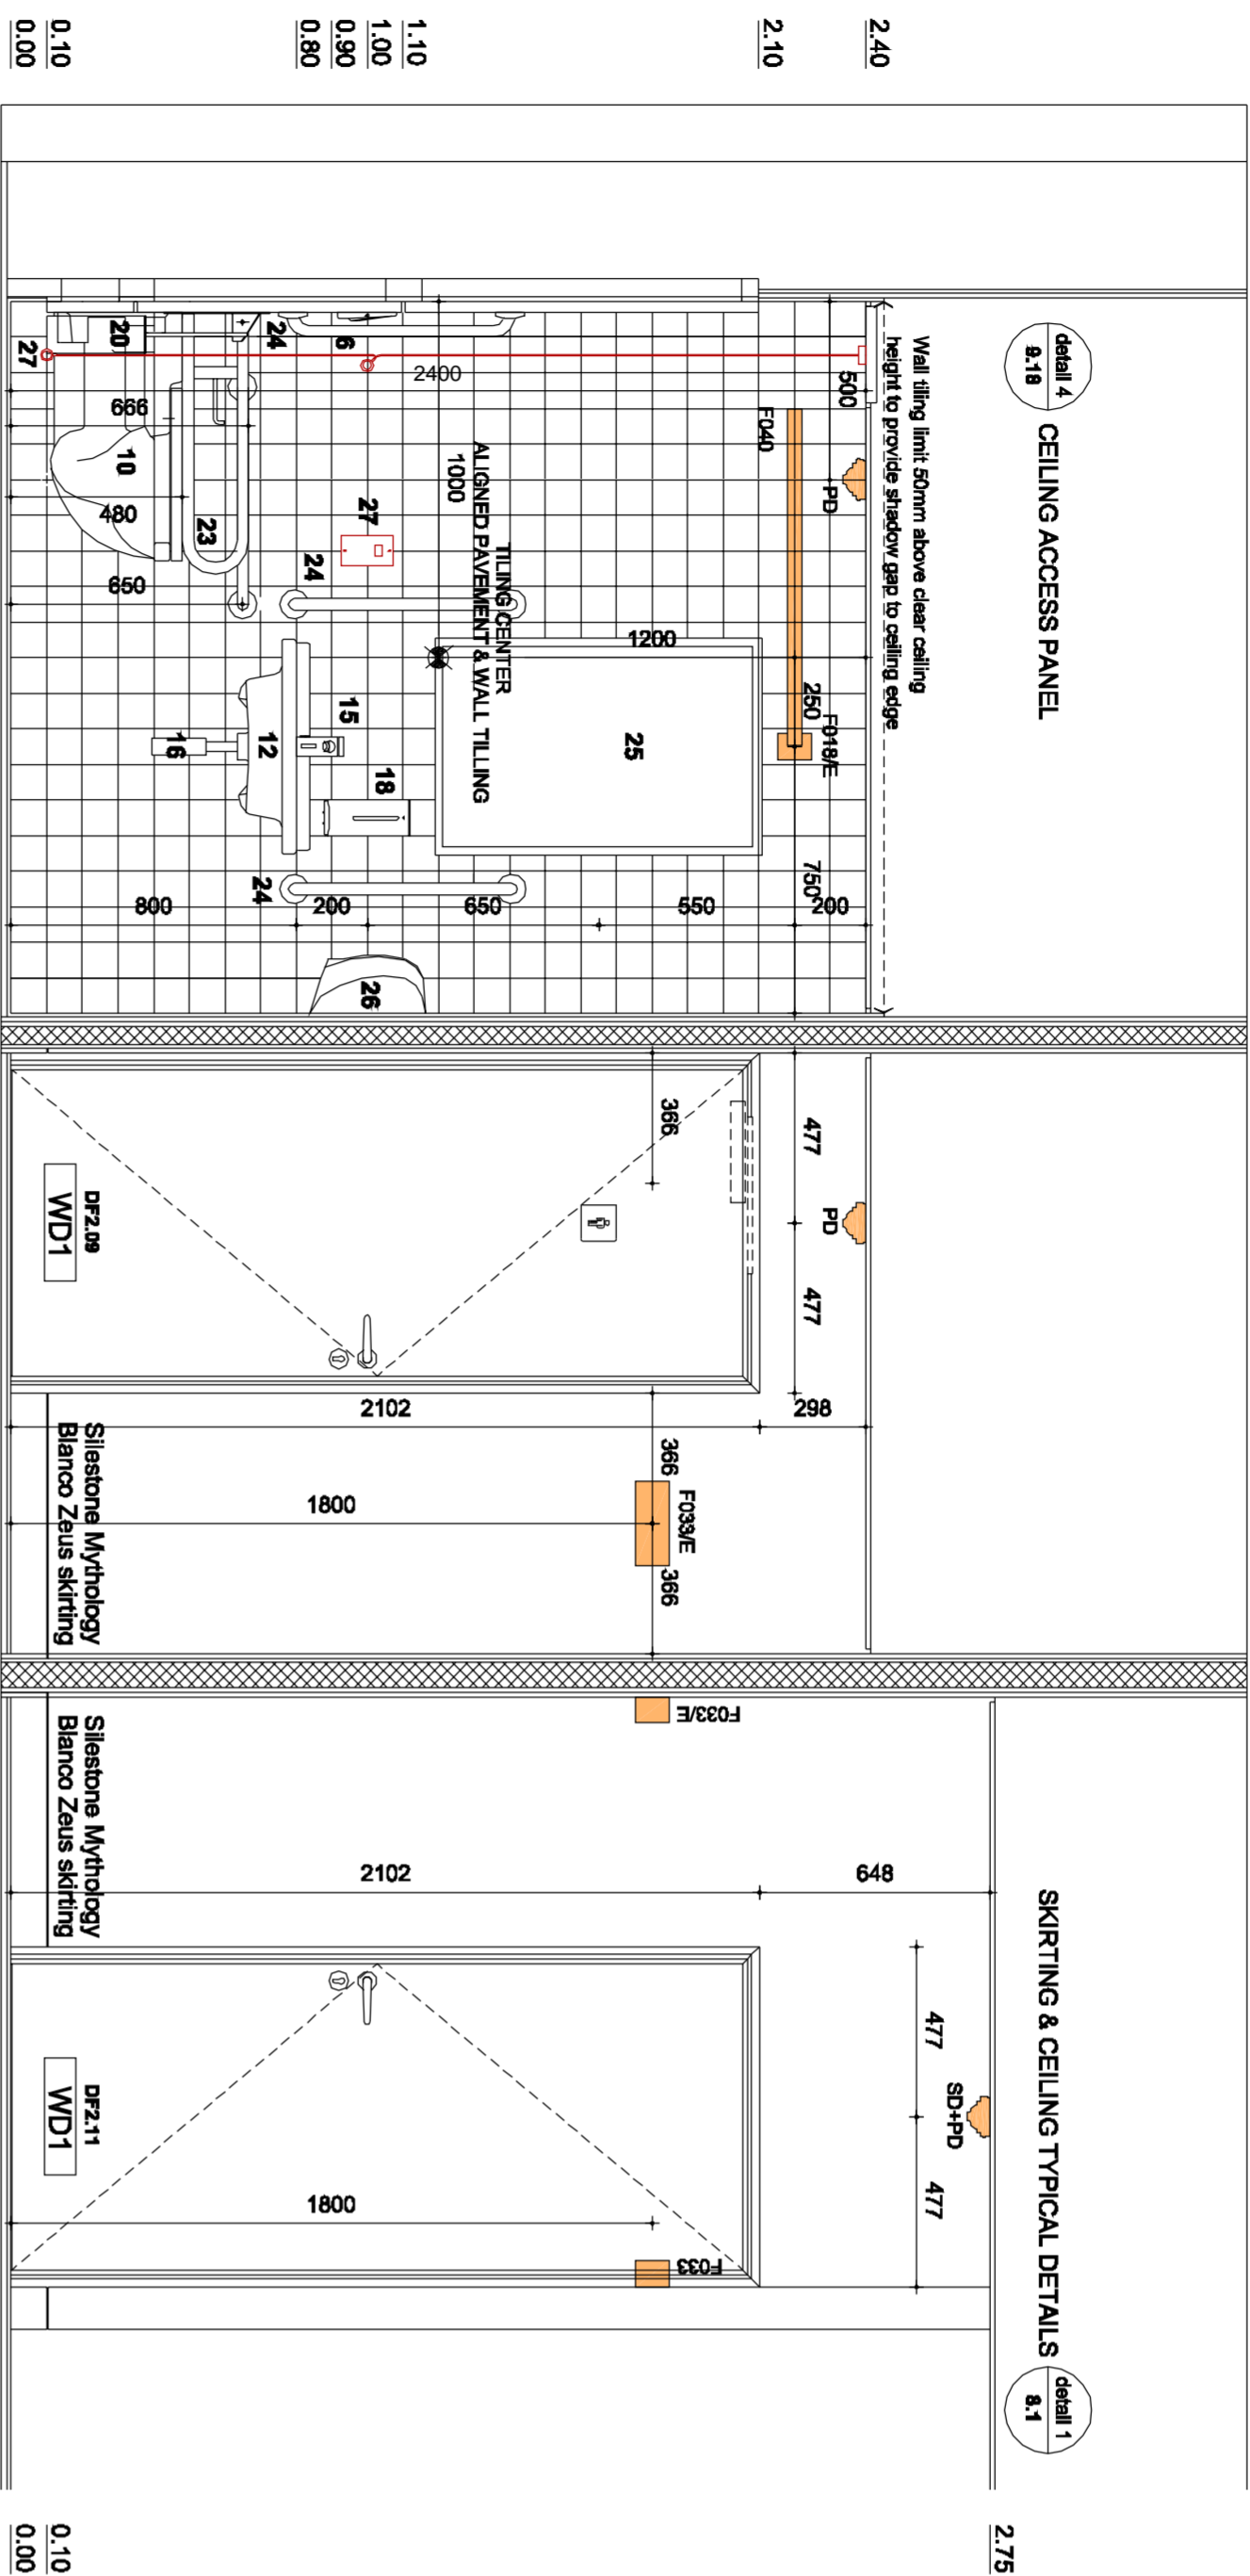

DETAILED SECTION S3

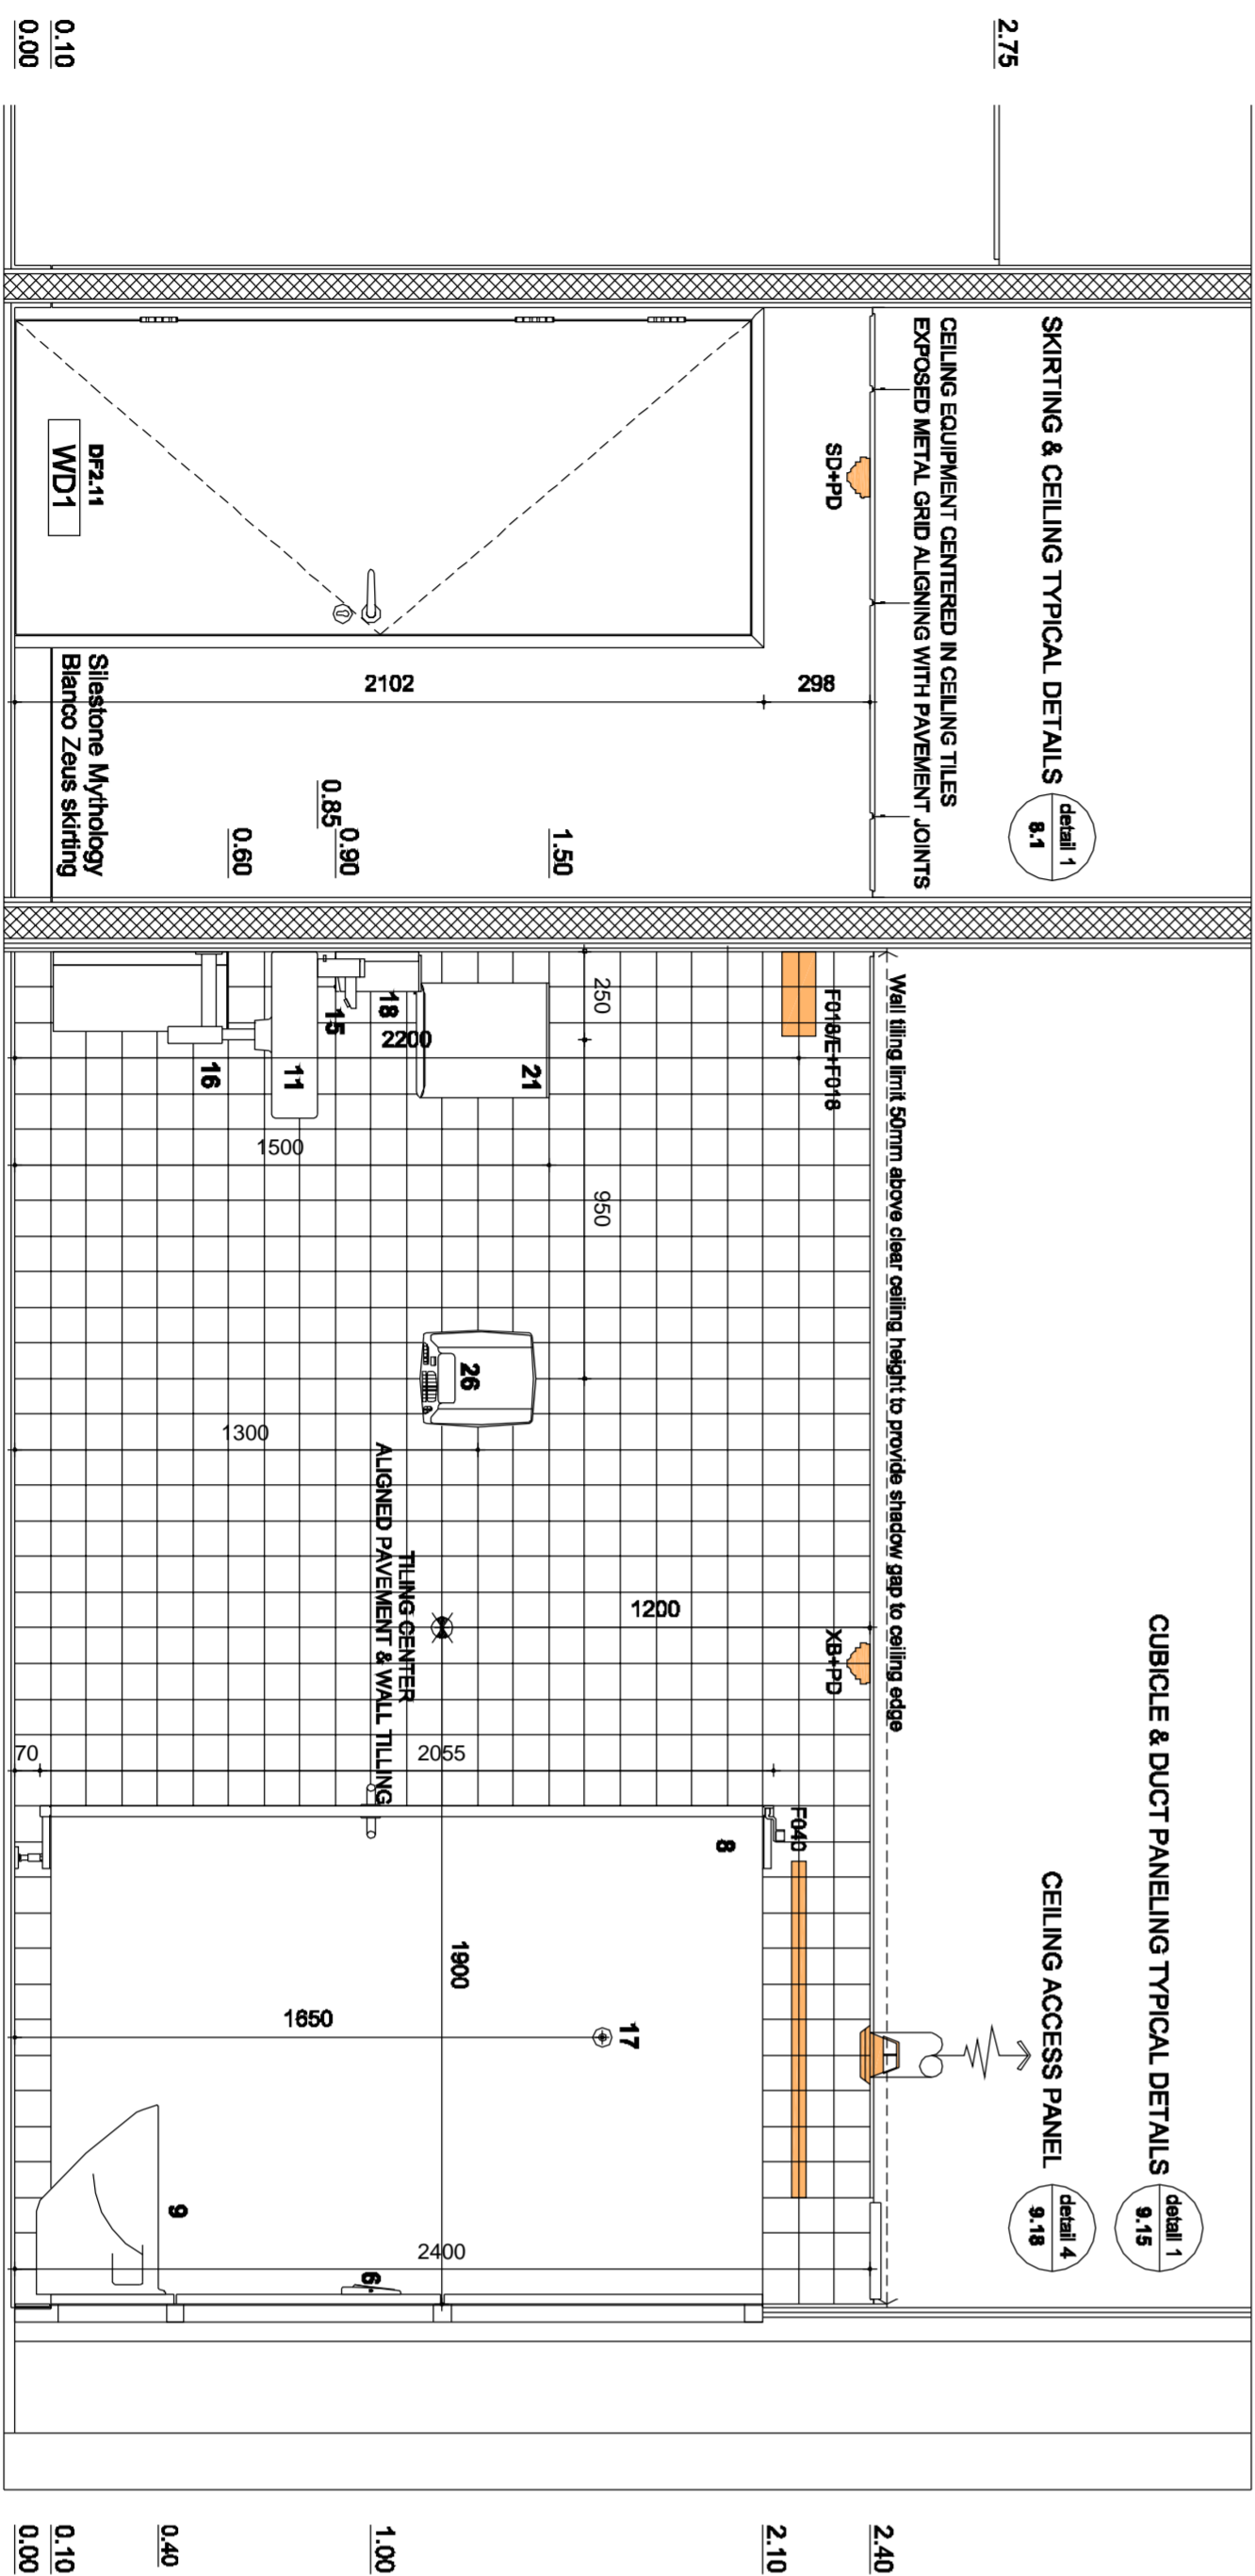

DETAILED SECTION S4

General plumbing fixtures:

Wall hung installation systems

1. Gebert Durok toilet frame with pre-wall brackets and extension set;
2. Gebert Durok toilet frame;
3. Gebert Durok toilet frame;
4. Gebert Durok toilet frame for the disabled with pre-wall brackets and extension set;
5. Plywood patress (installed to comply with design drawings measurements for disabled toilets);

- Flush plates
6. Gebert Marmbo stainless steel single flush toilet plate;
  7. gebert Marmbo stainless steel hand operated pneumatic urinal control;

- Toilets partition wall system
8. Kermil, cubicle system Noxx TR, white 9005;

- Toilets
9. Duravit, wall mounted toilet Duraplus, Homberg;
  10. Duravit, disabled wall-mounted toilet, Starck 3 #220309;

- Washbasins
11. Duravit, Vero;
  12. Duravit, disabled washbasin, Starck 3 #030960;

- Urinals
13. Duravit, Bil;
  14. Duravit, Starck 3 Ceramic urinal partition; (OMITTED)

- Basin mixer tap & bottle trap
15. Keuco, Plan, single lever washbasin mixer without pop-waste, 54902;
  16. (DISABLED TOILET) Keuco, Plan, single lever washbasin mixer without pop-waste, with extended lever, 54902;
  18. Keuco, stainless steel finish bottle trap, 59906;

- Accessories
17. Keuco, Plan, stainless steel back with door buffer, 14911;
  18. Keuco, Plan, stainless steel toilet paper holder, 14954;
  19. Keuco, Plan, stainless steel toilet brush set, 14984;
  20. Keuco, Plan, stainless steel toilet brush set, 14984;
  21. Keuco, Plan, stainless steel toilet brush set with long handle, 34964;
  22. Keuco, Plan, stainless steel paper towel dispenser, 14885;
  23. Keuco, Plan, stainless steel paper towel dispenser, 14885;
  24. Mediclinica, stainless steel drop-down wall-mounted grab rail, BG0800C5;
  25. Mediclinica, stainless steel mirror, B-145 2436;
  27. Mediclinica, Mediflow, stainless steel hand dryer with thermostat control system;

USE THIS DRAWINGS FOR CEILING EQUIPMENT SETTING OUT

CONSTRUCTION

REVISION	DATE	DESCRIPTION
D	19.11.08	UPDATED REFERENCES TO GENERAL PLUMBING FIXTURES
		UPDATED DIMENSIONS TO CUBICLE SYSTEM PARTITIONING

DATE	NOV 2008
SCALE	1:200/4:1
9.6	
CONSTRUCTION DRAWINGS	ASSIST.: FERNANDO CALOJA
2ND FLOOR TOILETS - MEN'S TOILET SECTIONS	DESIGN: MIGUEL BUEZA
AUTOMATICALLY GENERATED BY THE 3D TO 2D CONVERSION TOOL. THE 3D TO 2D CONVERSION TOOL IS A TOOL FOR AUTOMATICALLY GENERATING 2D DRAWINGS FROM 3D MODELS. IT IS NOT A DESIGN TOOL. IT IS NOT A DESIGN TOOL. IT IS NOT A DESIGN TOOL.	