


TOILETS & SUPPORT DETAILS

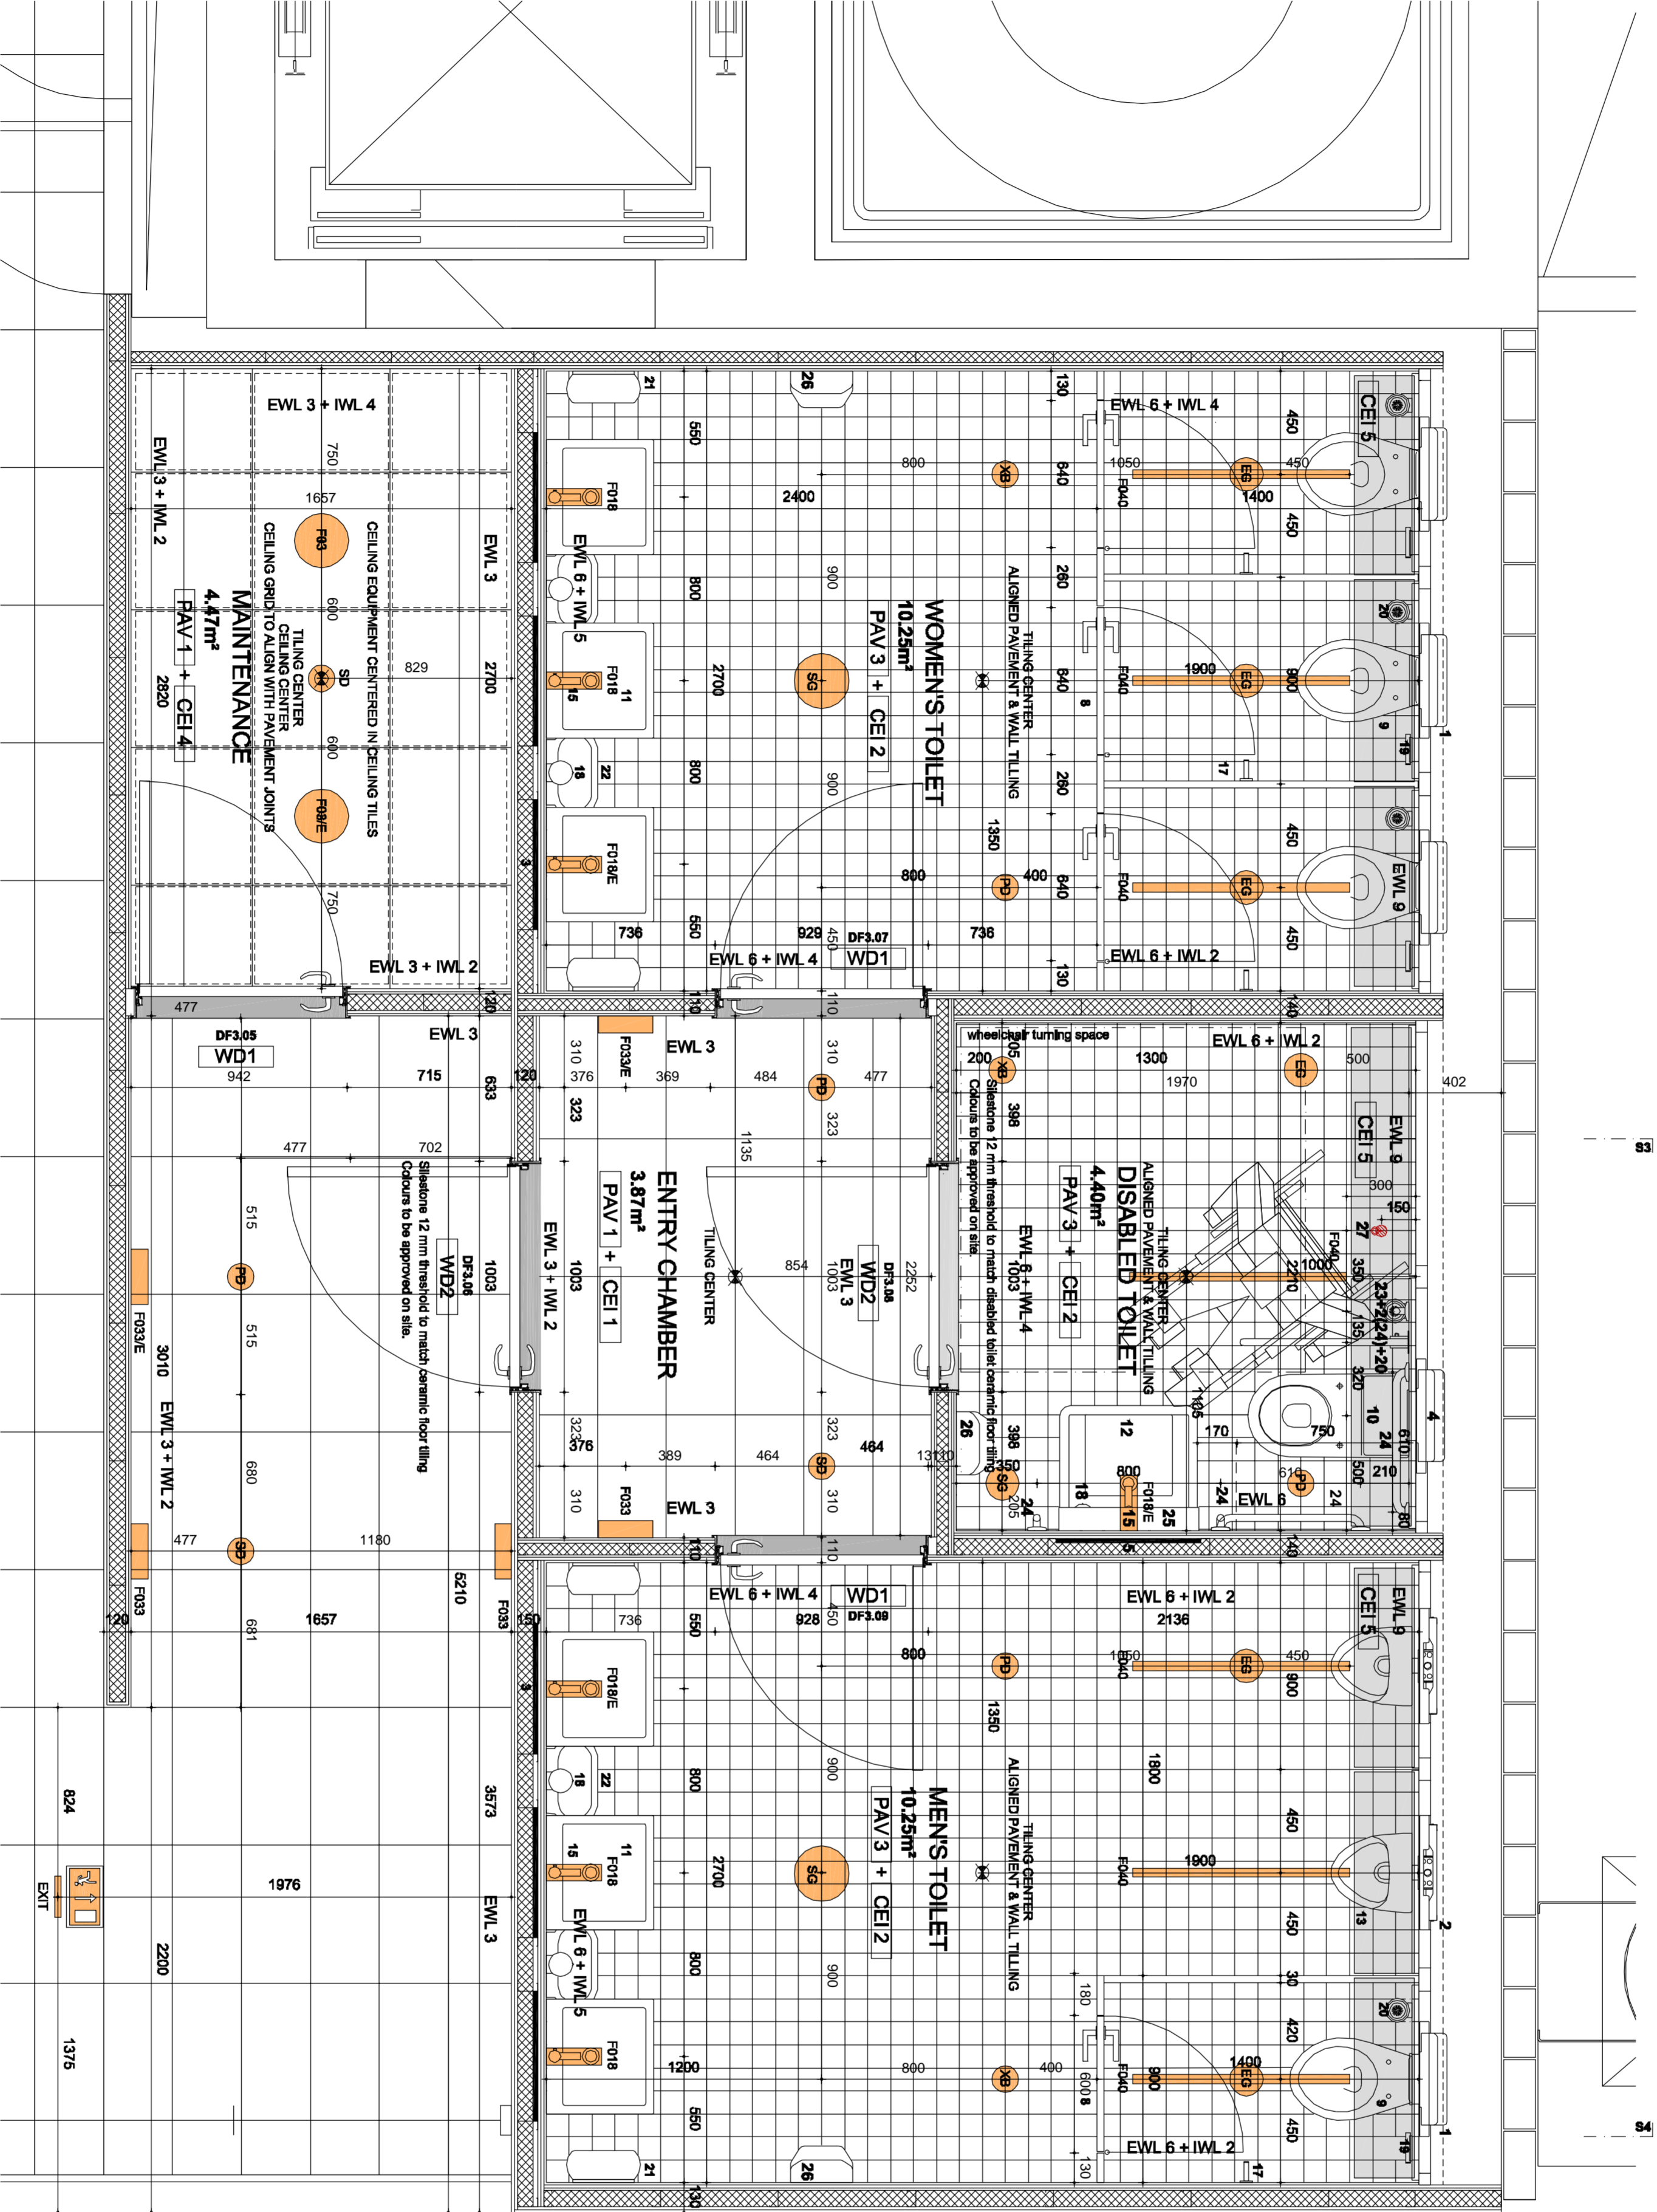

FLOOR PLAN DRAWING

USE THIS DRAWINGS FOR CEILING EQUIPMENT SETTING OUT

REVISION	DATE	DESCRIPTION
D	19.11.08	UPDATED REFERENCES TO GENERAL PLUMBING FIXTURES UPDATED DIMENSIONS TO CLAUCE SYSTEM PARTITIONING

CONSTRUCTION

REVISION	DATE	DESCRIPTION
D	19.11.08	UPDATED REFERENCES TO GENERAL PLUMBING FIXTURES UPDATED DIMENSIONS TO CLAUCE SYSTEM PARTITIONING

General plumbing fixtures:

Wall hung installation systems

1. Gabeit Ducto toilet frame with pre-wall brackets and extension set.
2. Gabeit Ducto toilet frame with pre-wall brackets and extension set.
3. Plywood padlock.
4. Gabeit Ducto toilet frame for the disabled with pre-wall brackets and extension set.
5. Plywood padlock (installed to comply with design drawings measurements for disabled toilets).

Flush plates

6. Gabeit Mamba stainless steel single flush toilet plate.
7. Gabeit Mamba stainless steel hand operated pneumatic urinal control.

Toilets partition wall system

8. Kemmlic cubicle system Noxx TR, white 9095.

Toilets

9. Duravit, wall mounted toilet Duraplus, Homberg.
10. Duravit, disabled wall-mounted toilet, Starck 3 #220399.

Washbasins

11. Duravit, Vero.
12. Duravit, disabled washbasin, Starck 3 #203960.

Urinals

13. Duravit, Bil.
14. Duravit, Starck 3 Ceramic urinal partition. (OMITTED)

Basin mixer tap & bottle trap

15. Keuco, Plan, single lever washbasin mixer without pop-waste, 54902.
16. Keuco, Plan, single lever washbasin mixer without pop-waste, with extended lever, 54902.
17. Keuco, stainless steel flush bottle trap, 59906.

Accessories

17. Keuco, Plan, stainless steel hook with door buffer, 14911.
18. Keuco, Plan, stainless steel lotion dispenser, 14954.
19. Keuco, Plan, stainless steel toilet paper holder, 14954.
20. Keuco, Plan, stainless steel toilet brush set, 14954.
21. (DISABLED TOILET) Keuco, Plan, stainless steel toilet brush set with long handle, 34994.
22. Keuco, Plan, stainless steel wall mounted waste bin, 14988.
23. Keuco, Plan, stainless steel wall mounted waste bin, 14988.
24. Mediclinica, stainless steel drop-down wall-mounted grab rail, BQ4800CS.
25. Mediclinica, stainless steel mirror, B-45 2436.
26. Mediclinica, stainless steel hand dryer with thermostatic control system.
27. Disabled persons call system.

General pavements:

- PAV 1

Solux Ceramics, AU GMR 050 Antiracle Bright, 300x600 mm, R9 slip rating.

- PAV 2

15 mm painted parquet, Bergland-parkett Ash Technograu Terra-Epoca 2400x140x15 mm, glued installation with Skeabond-TS4.

- PAV 3

Solux Ceramics, Alut ZCPD099, Off White, 100x100 mm.

General walls:

- EWL 1

Glazed Deaustade, Laminated (extra clear low-iron) glass. (OMITTED)

- EWL 2

Acoustic laminated safety glass.

- EWL 3

12.5 mm double layer of standard plasterboard painted white RAL 9010.

- EWL 4

12.5 mm sound resistant double layer of plasterboard painted white RAL 9010.

- EWL 5

12.5 mm moisture resistant double layer of plasterboard painted white RAL 9010.

- EWL 6

Solux Ceramics, Alut ZCPD099, Off White, 100x100 mm.

- EWL 7

12.5 mm moisture resistant double layer of plasterboard.

- EWL 8

12.5 mm sound resistant double layer of plasterboard.

- EWL 9

30 mm Kemmlic duct panel, Noxx TR, white 9095.

- IWL 1

70 mm Lightweight metal stud at 600 mm centers.

- IWL 2

70 mm Lightweight metal stud at 600 mm centers.

- IWL 3

60 mm Lightweight metal stud at 600 mm centers.

- IWL 4

50 mm Lightweight metal stud at 600 mm centers.

- IWL 5

47mm Acoustic partition slab between studs.

- IWL 6

90 mm Lightweight metal stud at 600 mm centers.

- IWL 7

67mm Acoustic partition slab between studs.

- IWL 8

12.5 mm sound resistant double layer of plasterboard.

- IWL 9

30 mm Kemmlic duct panel, Noxx TR, white 9095.

- IWL 10

70 mm Lightweight metal stud at 600 mm centers.

- IWL 11

70 mm Lightweight metal stud at 600 mm centers.

- IWL 12

60 mm Lightweight metal stud at 600 mm centers.

- IWL 13

50 mm Lightweight metal stud at 600 mm centers.

- IWL 14

47mm Acoustic partition slab between studs.

- IWL 15

90 mm Lightweight metal stud at 600 mm centers.

- IWL 16

67mm Acoustic partition slab between studs.

- IWL 17

12.5 mm sound resistant double layer of plasterboard.

- IWL 18

ARCHITECT: [Name], [Address], [City], [Country].
DATE: [Date].
SCALE: [Scale].
DRAWING NO.: [Drawing No.].
PROJECT NO.: [Project No.].
SHEET NO.: [Sheet No.].
SHEET TOTAL: [Sheet Total].