



TOILETS & SUPPORT DETAILS

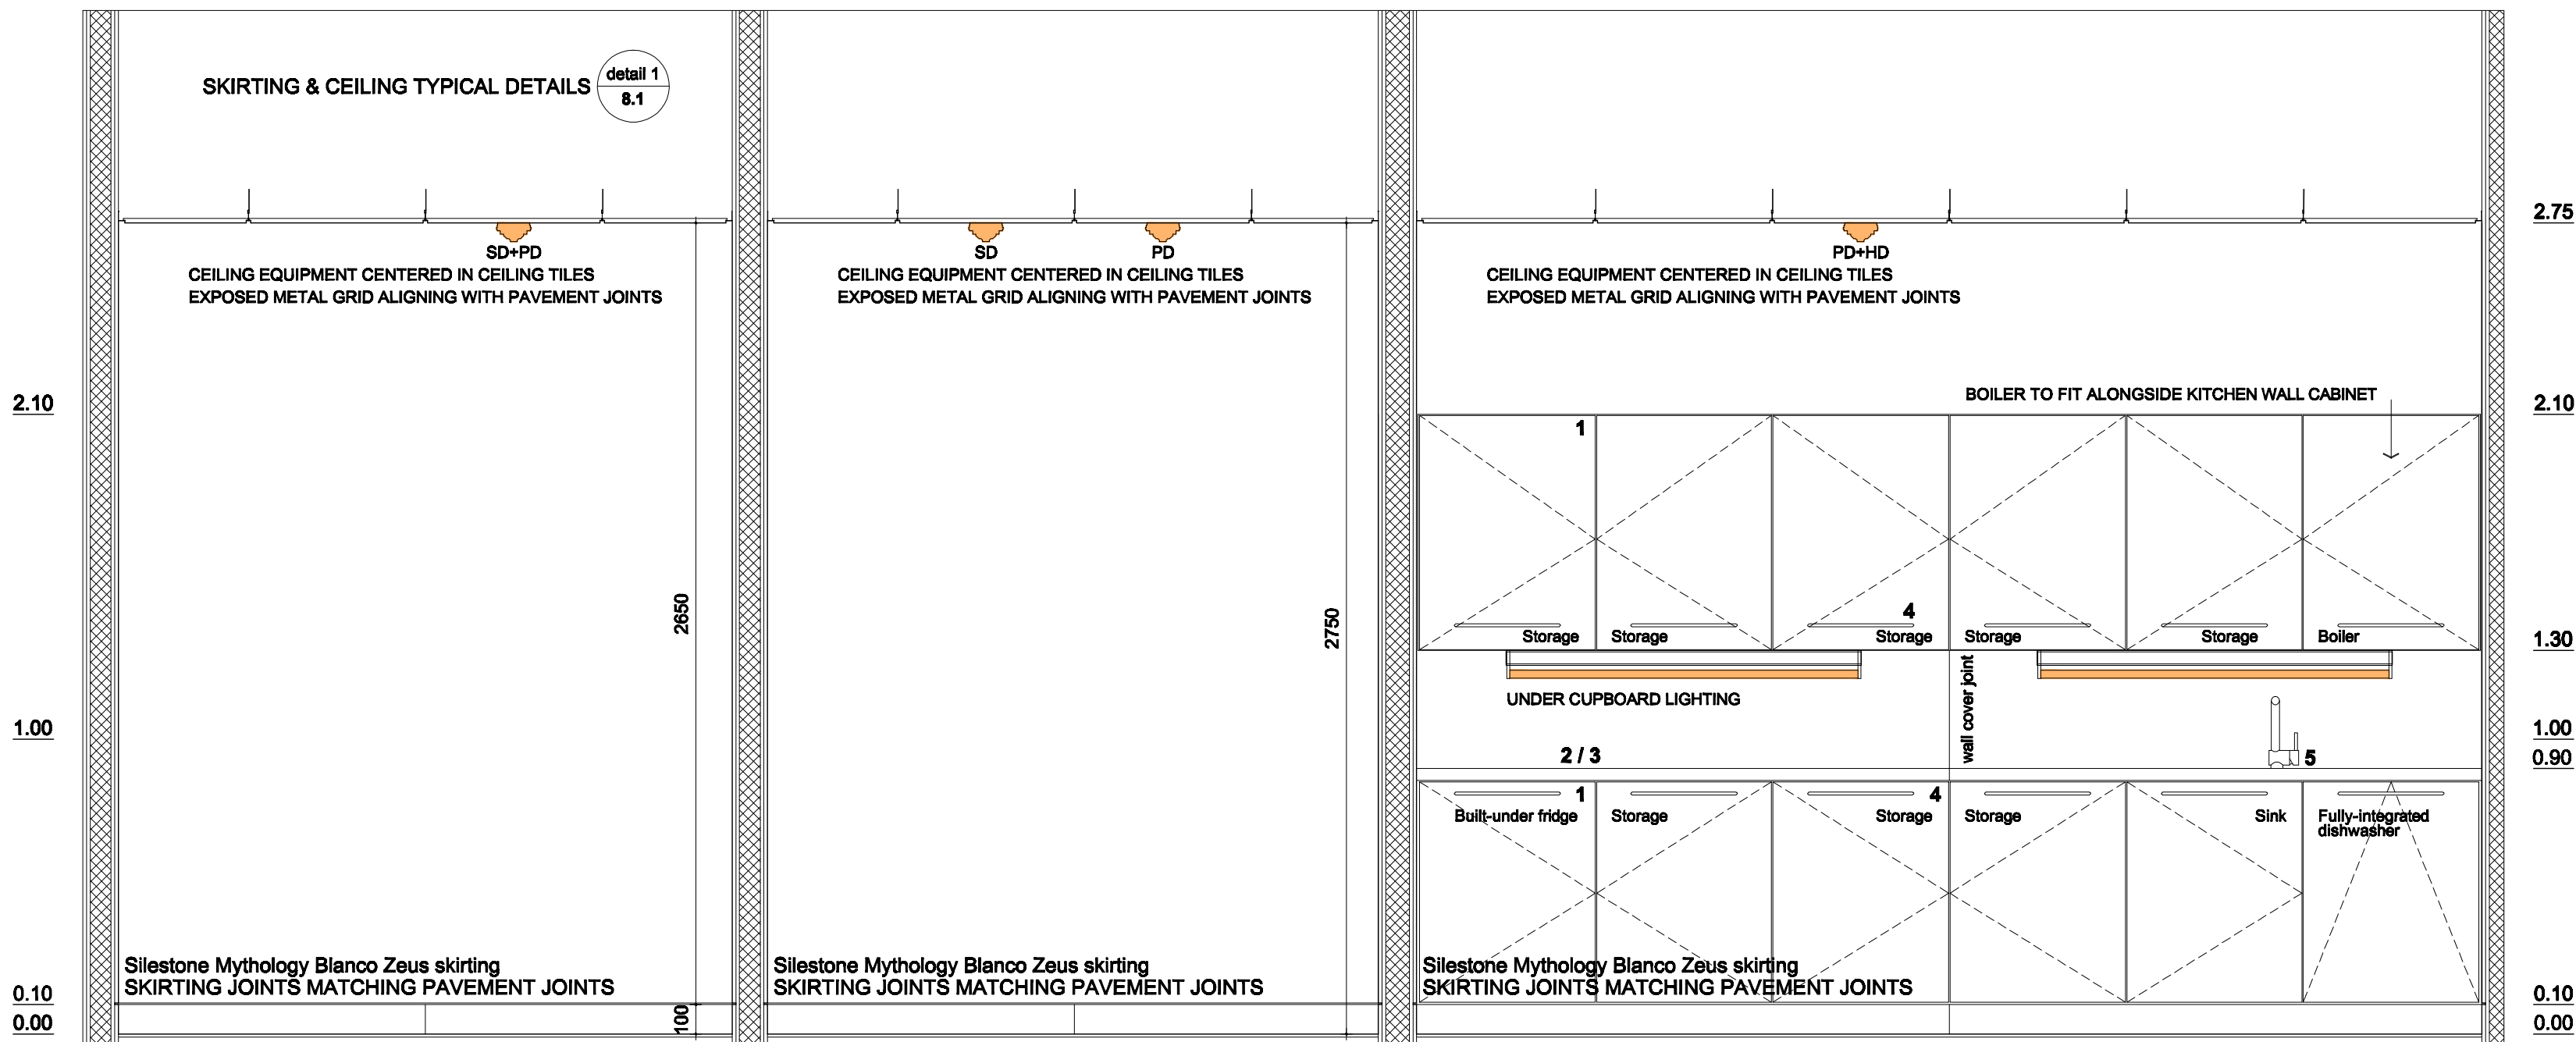

TEA STATION DETAILED SECTION S1

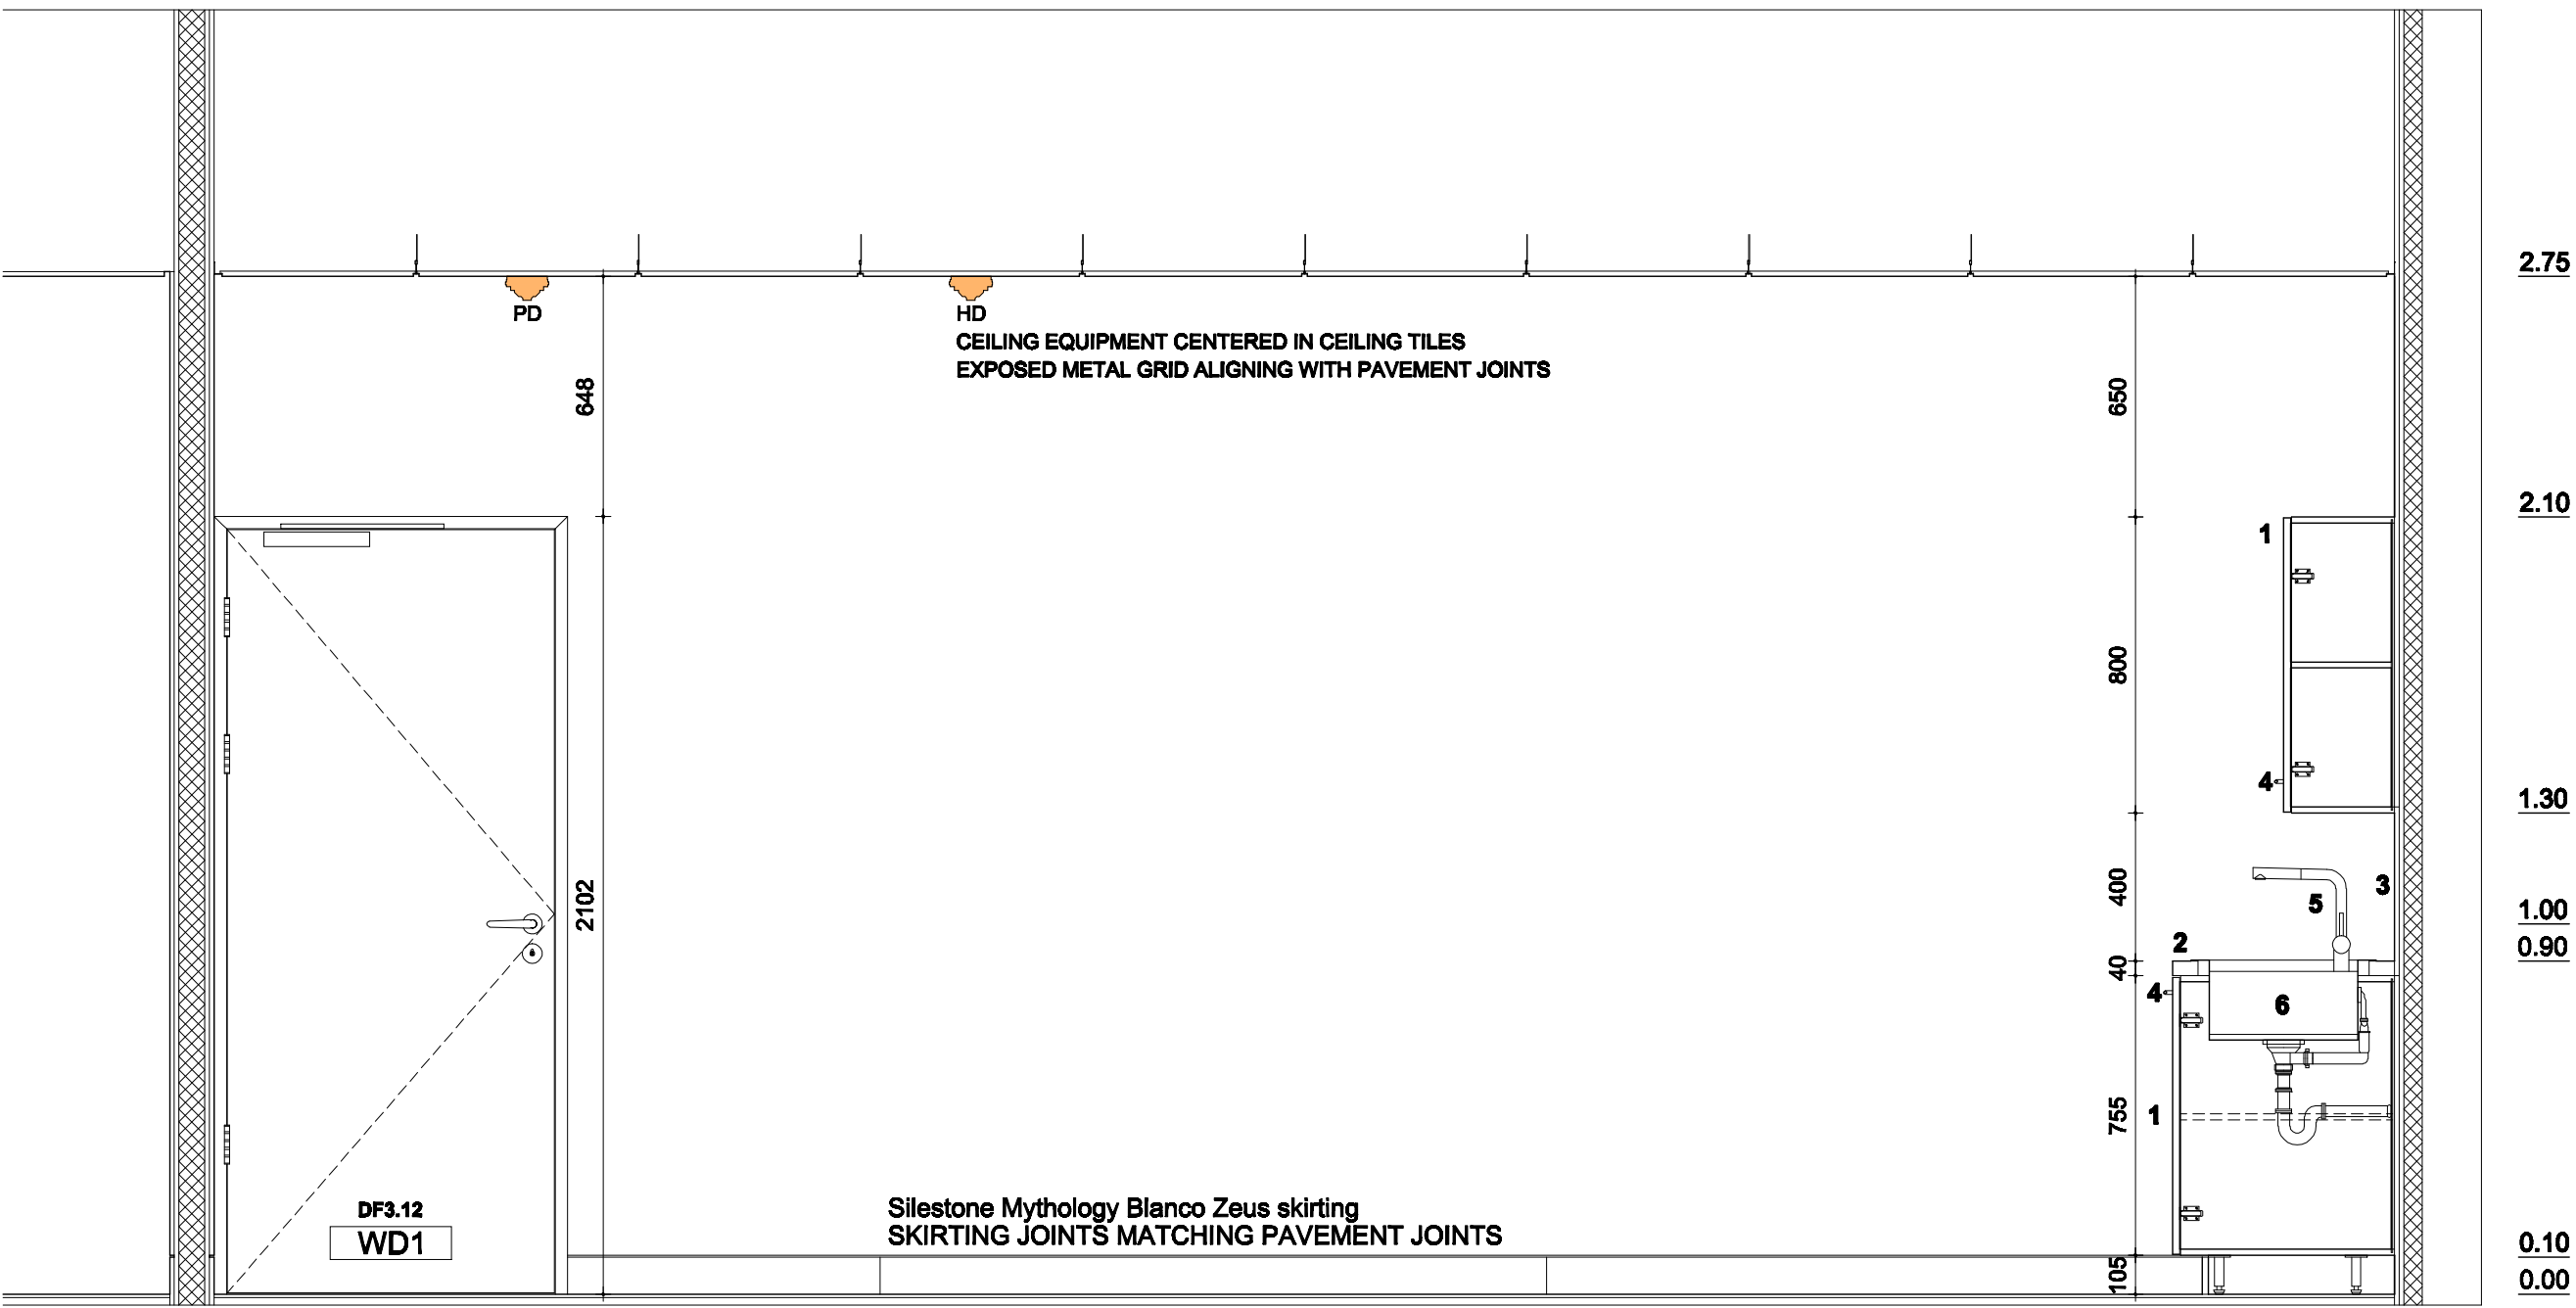

TEA STATION DETAILED SECTION S2

Tea station kitchen:

1. White gloss cabinets.
2. Silestone Mythology Blanco Zeus 40 mm (20x20 mm) countertop.
3. Silestone Mythology Blanco Zeus 12 mm partial back wall cover.
4. Stainless steel D shaped cabinet handles, 352x10 mm.
5. Smeg Siena Single Lever Mixer.
6. Smeg LQ861D Single Bowl Single Drainer Ultra Low Profile Sink.

General pavements:

- PAV 1  
Solus Ceramics, AU.GMR.050 Anthracite Bright, 300x600 mm, R9 slip rating.
- PAV 2  
15 mm painted parquet, Bergland-parkett Ash Technograu Trend-Epoca 2400x140x15 mm, glued installation with SikaBond-T54.
- PAV 3  
Solus Ceramics, Modular 5web50189 light grey, 100x100 mm.

General walls:

- EWL 1  
Glazed Balustrade, Laminated (extra clear low-iron) glass.
- EWL 2  
Acoustic laminated safety (extra clear low-iron) glass, transparent PVB, vertical sealed joints.
- EWL 3  
12.5 mm double layer of standard plasterboard painted white RAL 9010.
- EWL 4  
12.5 mm sound resistant double layer of plasterboard painted white RAL 9010.
- EWL 5  
12.5 mm moisture resisting double layer of plasterboard painted white RAL 9010.
- EWL 6  
Solus Ceramics, Modular 5web50189 light grey, 100x100 mm.  
12.5 mm moisture resisting double layer of plasterboard.
- EWL 7  
Wall coverings to define.  
12.5 mm sound resistant double layer of plasterboard.
- EWL 8  
12.5 mm sound resistant double layer of plasterboard.

- IWL 1  
70 mm Lightweight metal stud at 600 mm centers.
- IWL 2  
70 mm Lightweight metal stud at 600 mm centers.  
67mm Acoustic partition slab between studs.
- IWL 3  
50 mm Lightweight metal stud at 600 mm centers.
- IWL 4  
50 mm Lightweight metal stud at 600 mm centers.  
47mm Acoustic partition slab between studs.

General ceilings:

- CEI 1 - 2ND FLOOR  
Suspended ceilings system.  
Standard plasterboard painted white RAL 9010.
- CEI 1 - 3RD FLOOR  
Suspended ceilings system.  
12.5 mm double layer of standard plasterboard painted white RAL 9010.
- CEI 2  
Suspended ceilings system.  
Moisture resisting plasterboard painted white RAL 9010.
- CEI 3  
Suspended ceilings system.  
Plasterboard painted white RAL 9010 (Sound resistant double layers of 12.5 mm each side).  
100 mm Acoustic partition slab between light steel joists.
- CEI 4  
Ceiling tiles 600x600x15 mm, Rockfon Pacific® range, E edge detail.  
Rockfon White pre-finished.
- # Separation between ceramic tiles and parquet flooring with Schluter® - DECO, stainless steel.  
# Movement joints with Schluter® - DILEX BWB, recycled rigid PVC.  
# All visible steel plates coated in white RAL 9010.

USE THIS DRAWINGS FOR CEILING EQUIPMENT SETTING OUT

CONSTRUCTION

REVISION DATE DESCRIPTION

AUDI WEST LONDON	DATE	SEPT. 08	9.12
LONDON, UK	SCALE:	1/20@A1	
3RD FLOOR ANCILLARY ROOMS - SECTIONS	CONSTRUCTION DRAWINGS	ASSIST.:	FERNANDO CARLOTA
ATMB13 arquitectos lda R. Ricardo Espírito Santo, 9, cv. dta., 1200 750 Lisboa, tel.: 21 3831244, fax: 21 3831249	RESP.:	MIGUEL BELEZA	

Do not Scale. Used figured dimensions only. All dimensions to be checked on site.

All drawings to be read in conjunction with the Engineers' drawings. Any discrepancies between consultants drawings to be reported to the Architect before any work commences.