



## TOILETS & SUPPORT DETAILS

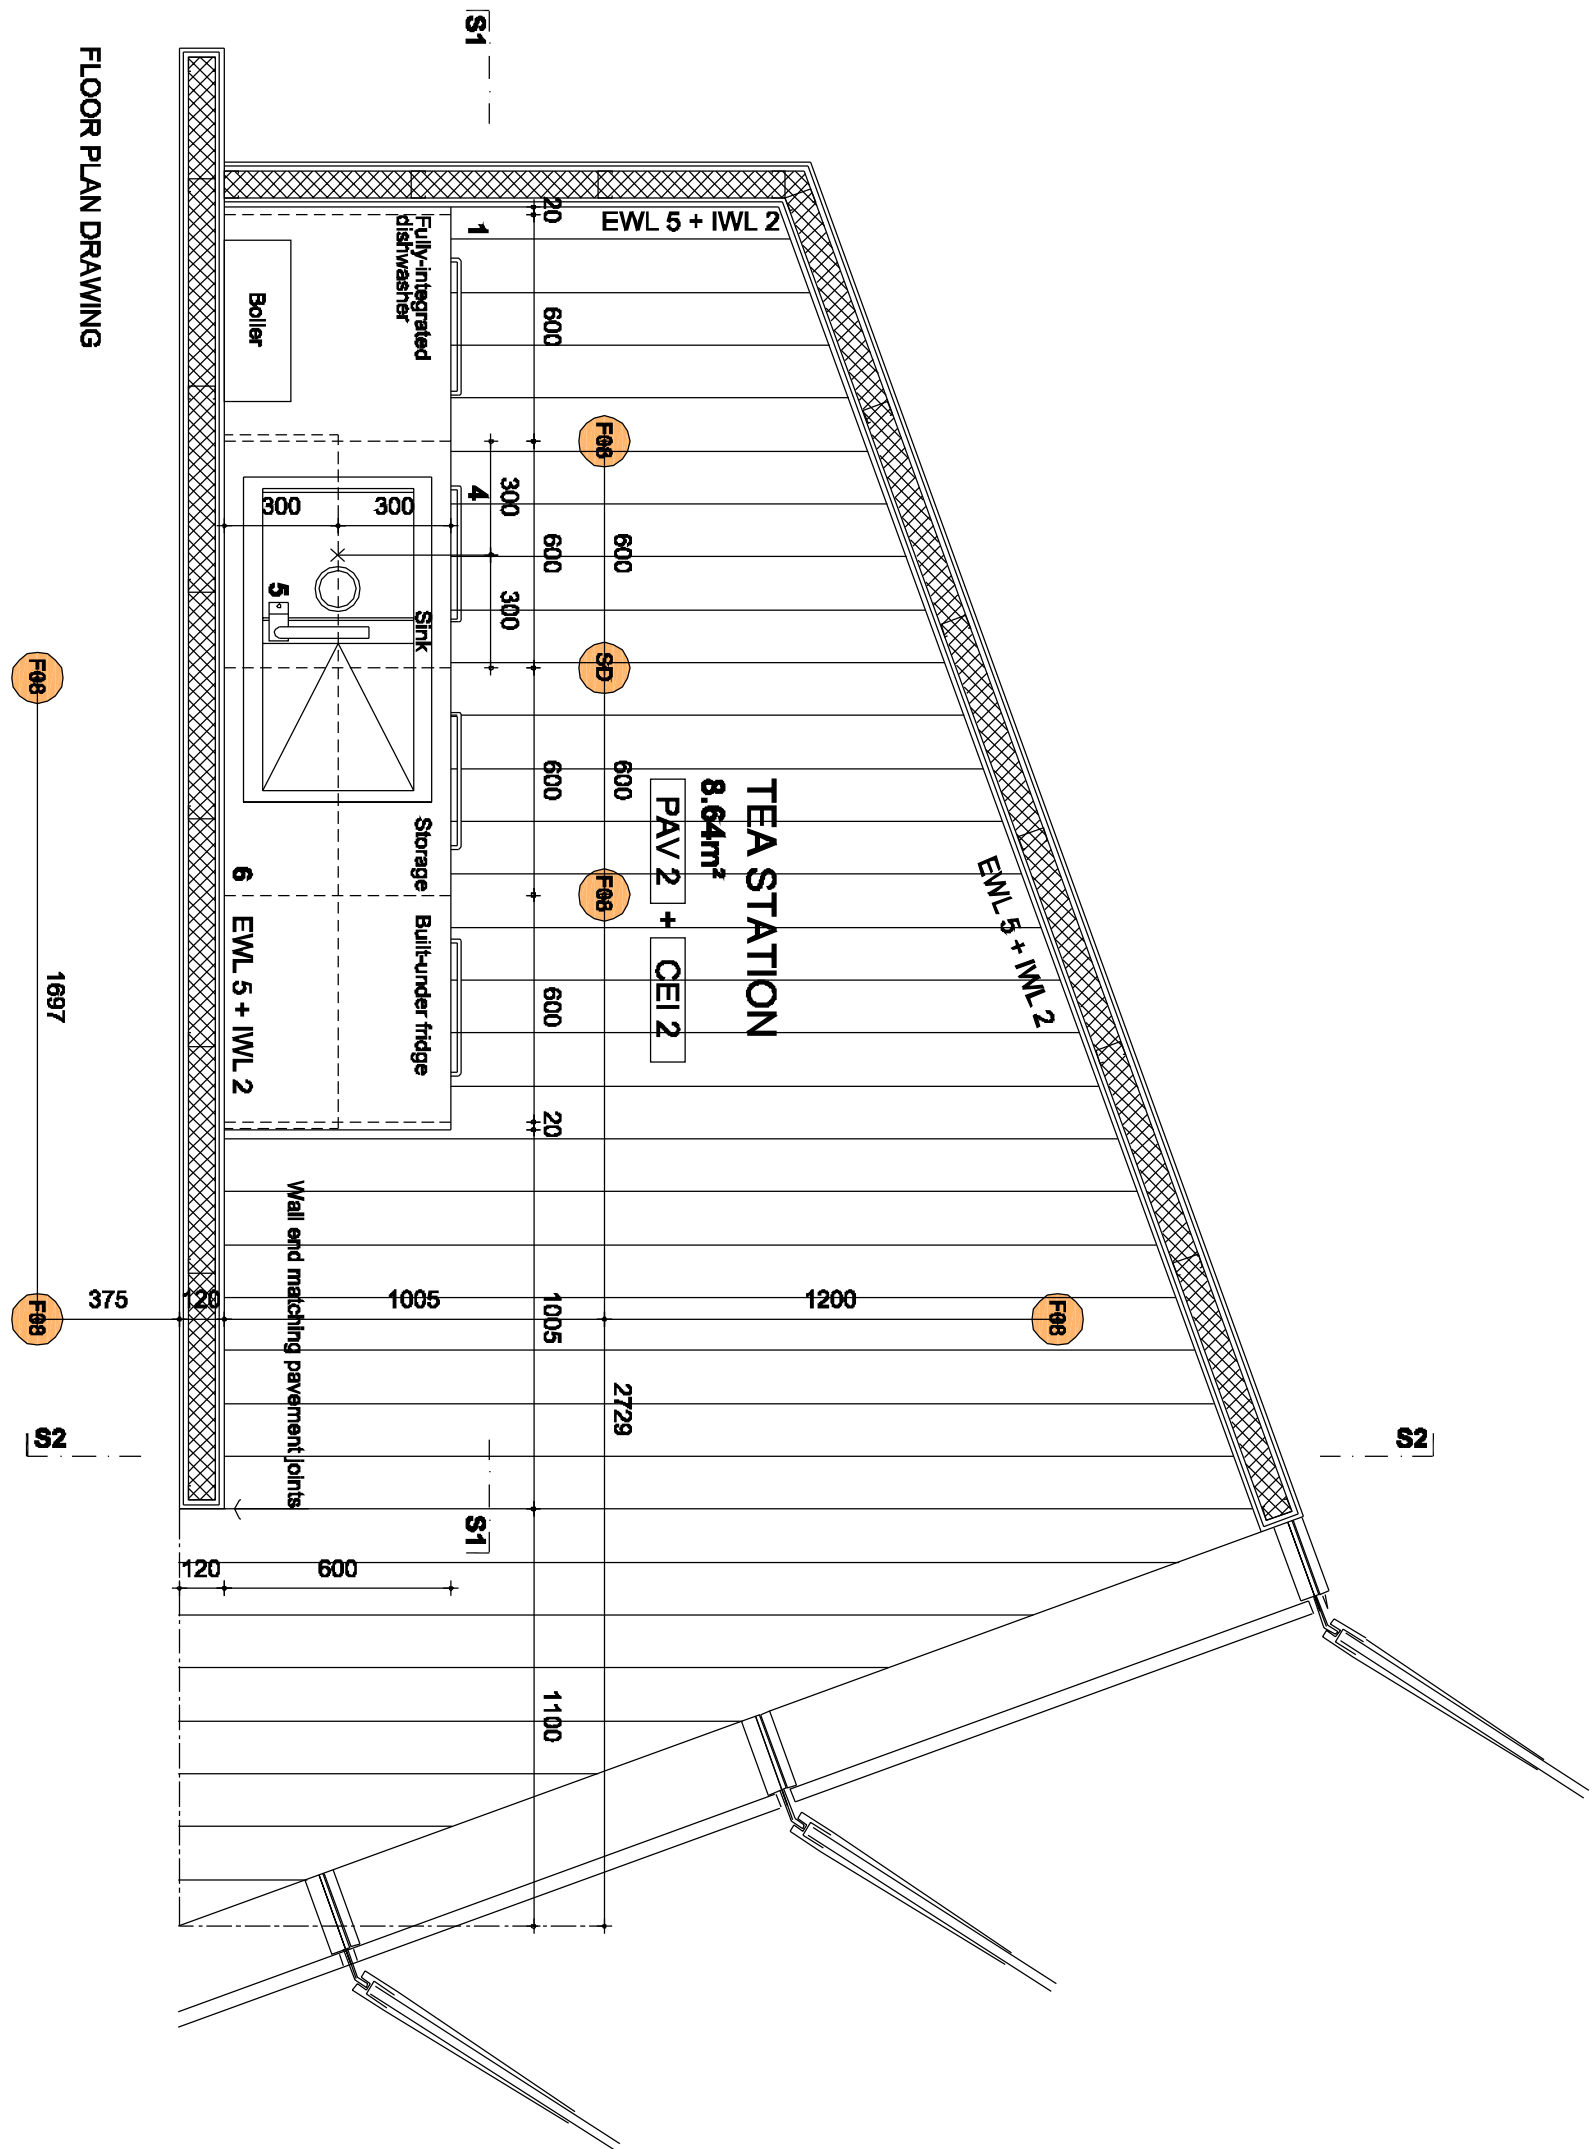

## DETAILED SECTION S1

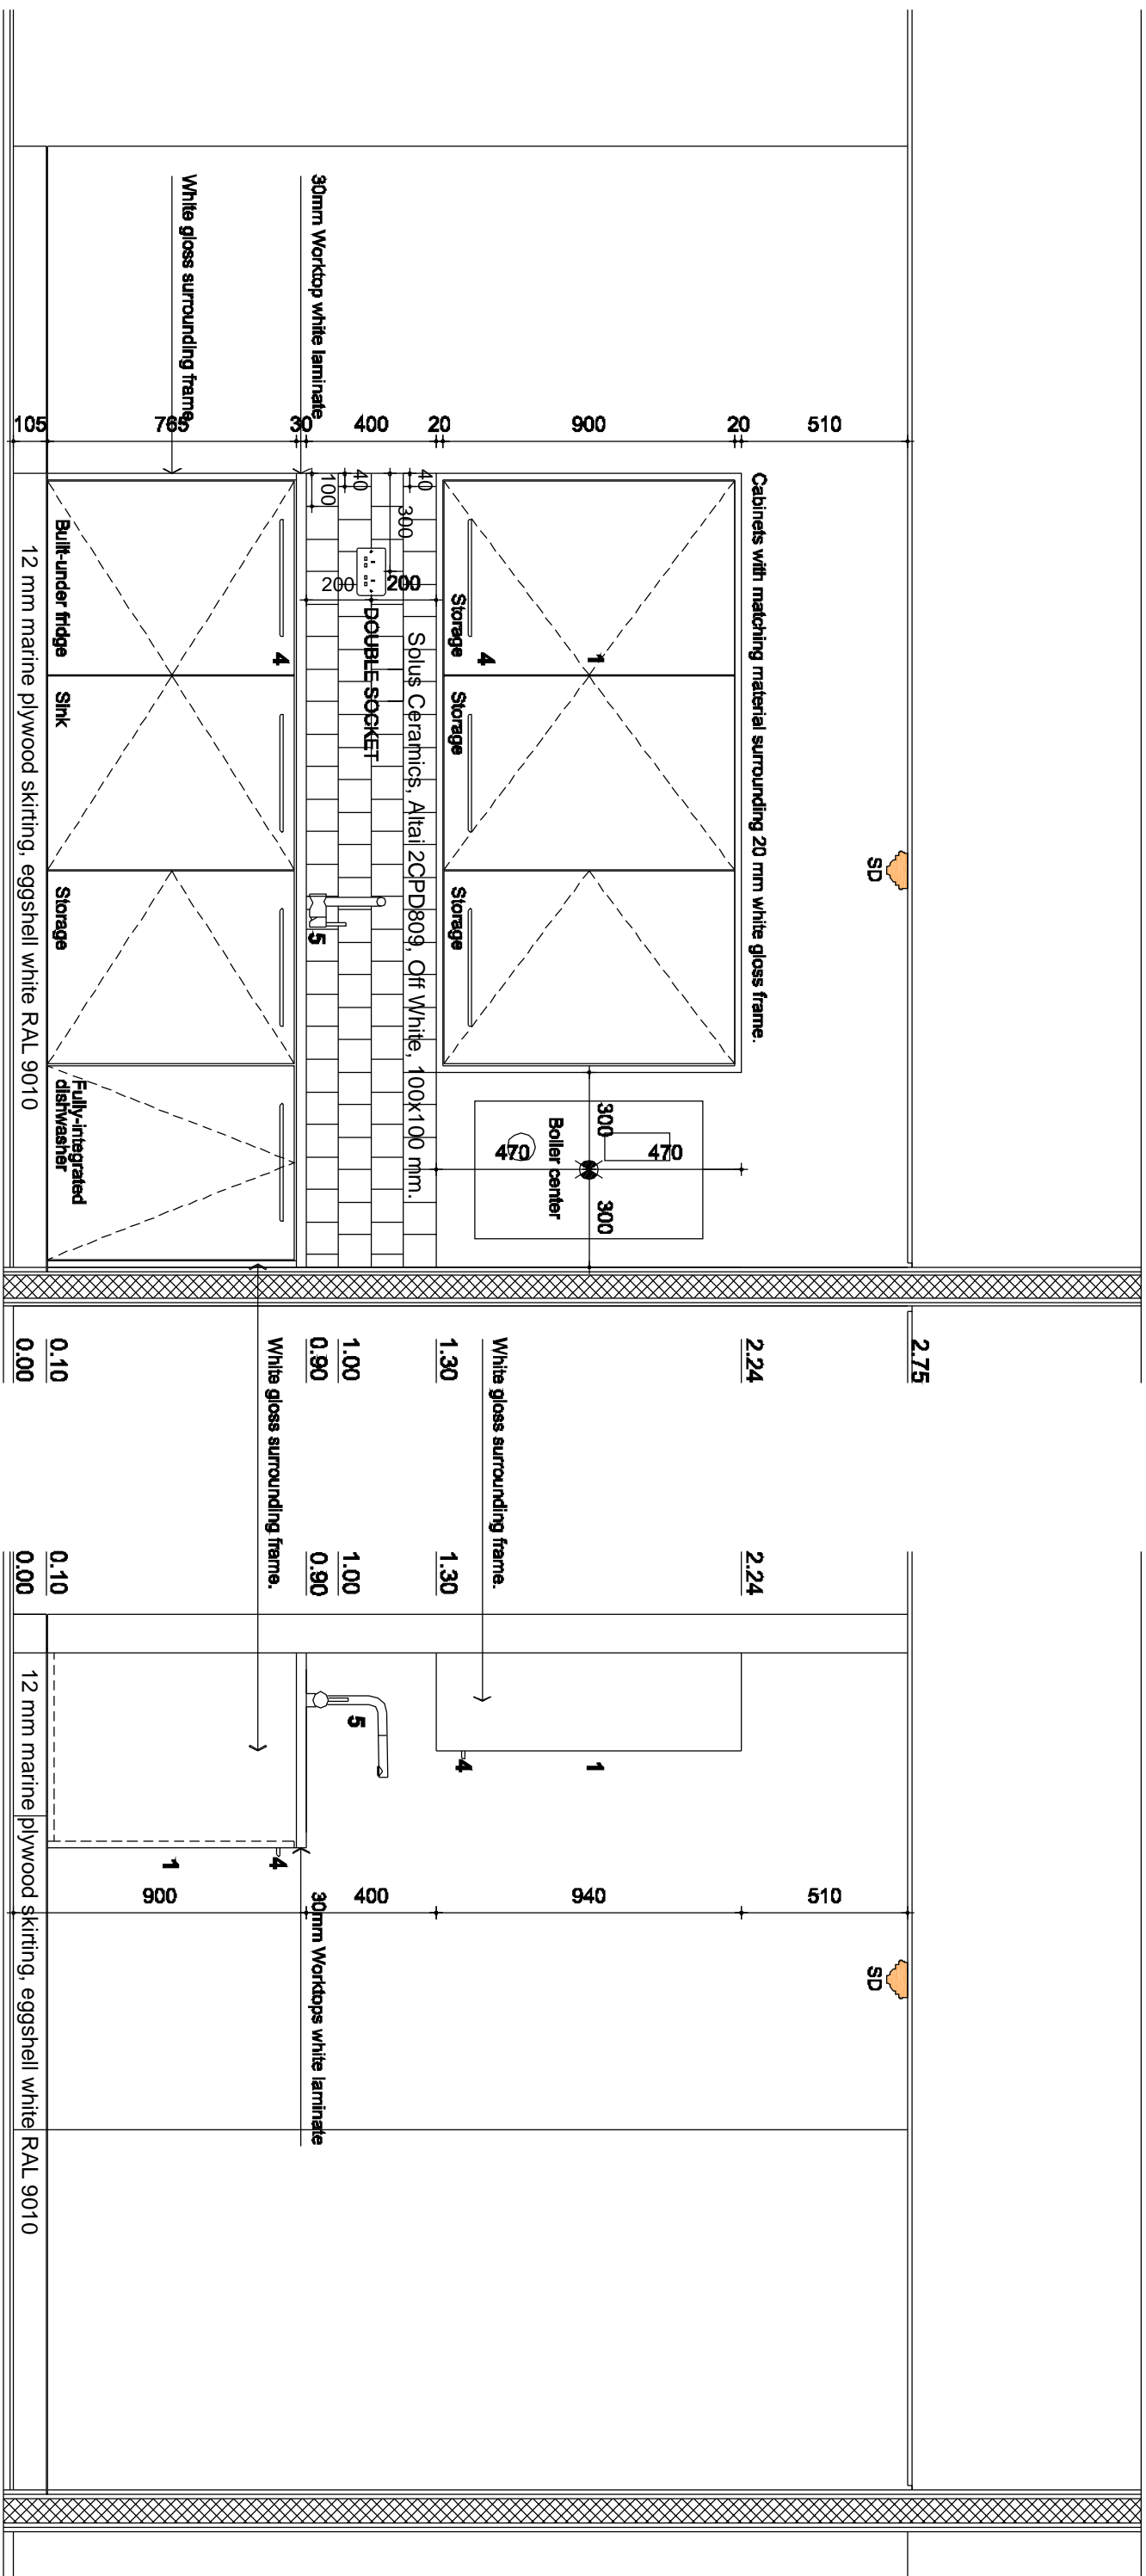

## DETAILED SECTION S2

REVISION	DATE	DESCRIPTION
A	20.01.09	DOUBLE SOCKET LOCATION & SILESTONE REPLACEMENT

- # Separation between ceramic tiles and parquet flooring with Schlüter - SCHIENE, stainless steel.
- # Movement joints with Schlüter® - DILEX EKS, movement zone on synthetic rubber.
- # GS (Rai 9011) insert: on wood - HB (Rai 1019) insert.
- # All visible steel plates coated in white RAL 9010.

USE THIS DRAWINGS FOR CEILING EQUIPMENT SETTING OUT

AUDI WEST LONDON LONDON, UK	DATE: JAN. 09	9.10
	SCALE: 1/200A1	

## CONSTRUCTION

**Tea station kitchen:**

1. White gloss cabinets.
2. Silstone Mythology Blanco Zeus 40 mm (20×20 mm) countertop. (OMITTED)
3. Silstone Mythology Blanco Zeus 12 mm partial back wall cover. (OMITTED)
4. Stainless steel D shaped cabinet handles, 352x10 mm.
5. Smeg Silena Single Lever Mixer.
6. Smeg LC861D Single Bowl Single Drainer Ultra Low Profile Sink.

### General pavements:

- PAV 1  
Solus Ceramics, ALU GMR 050 Anthracite Bright, 300x600 mm, R9 slip rating.
- PAV 2  
15 mm painted parquet, Bengard-parkett Ash Technogran Trend-Epoos 2400x, 40x15 mm  
glued installation with Skelbond-154.
- PAV 3  
Solus Ceramics, Modular Sweet501 (80 light grey, 100x100 mm,

**General walls:**

- |               |  |
|---------------|--|
| <b>EWL 1</b>  | Gleazed Balustrade, Laminated (extra clear (low-iron)) glass.                                      |
| <b>EWL 2</b>  | Acoustic laminated safety (extra clear (low-iron)) glass, transparent PVB, vertical sealed joints. |
| <b>EWL 3</b>  | Acoustic   |
| <b>EWL 4</b>  | 12.5 mm double layer of standard plasterboard painted white RAL 9010.                              |
| <b>EWL 5</b>  | 12.5 mm sound resistant double layer of plasterboard painted white RAL 9010.                       |
| <b>EWL 6</b>  | 12.5 mm moisture resisting double layer of plasterboard painted white RAL 9010.                    |
| <b>EWL 7</b>  | Solux Ceramix, Modular Sheet50/89 light grey, 100x100 mm.  |
| <b>EWL 8</b>  | 12.5 mm moisture resisting double layer of plasterboard.   |
| <b>EWL 9</b>  | Wall coverings to define   |
| <b>EWL 10</b> | 12.5 mm sound resistant double layer of plasterboard.  |
| <b>EWL 11</b> | 12.5 mm sound resistant double layer of plasterboard.  |

**General ceilings:**

- CEI 1 - 2ND FLOOR  
Suspended ceiling system  
Standard plasterboard painted white RAL 9010.
- CEI 1 - 3RD FLOOR  
Suspended ceilings system.  
12,5 mm double layer of standard plasterboard painted white RAL 9010.
- CEI 2  
Suspended ceilings system  
Moisture resistant plasterboard painted white RAL 9010.
- CEI 3  
Suspended ceilings system  
Plasterboard painted white RAL 9010 (Sound resistant double layers of 12,5 mm each side),  
100 mm Acoustic partition slab between light steel joists.
- CEI 4  
Ceiling tile 600x60x15 mm. Rockfon Pacified range, E edge detail.  
Rockfon White pre-finished.
- # Separation between ceramic tiles and parapet flooring with Schlüter - SCHEINER stainless steel  
# Movement joints with Schlüter® - DILEX ESKN, movement zone on synthetic rubber.  
# All visible steel plates coated in white RAL 9010.  
# All tiles steel plates coated in white RAL 9010.

USE THIS DRAWINGS FOR CEILING EQUIPMENT SETTING OUT

**Do not Scale. Used figured dimensions only. All dimensions to be checked on site**

All drawings to be read in conjunction with the Engineers' drawings. Any discrepancies between consultants drawings to be reported to the Architect before any work commences.