

revisions		date	rev
spec references and dimensions added		23.06.06 A	
Issued for construction.		23.07.07 B	
Drying over door replaced in lieu of full height blockwork.		06.08.07 C	
Issued for construction.			


notes

Exposed flange of ISA to be situated on side of wall away from fire hazard (eg. protected corridor) otherwise provide intumescent coating (M61/7xx)

Structural opening height of basement doors either +2100AFFL or +2395 AFFL. Refer to door schedule for more information

This drawing is the property of Lifschutz Davidson Ltd. No disclosure or copy of it may be made without the written permission of Lifschutz Davidson Ltd.

key plan

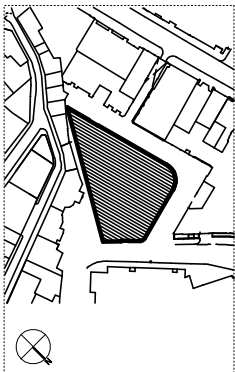

project
16-19 Gresse Street, London, W1

client
Derwent Valley Holdings

architect

Lifschutz Davidson Sandilands
Island Studios
22 St. Peter's Square
London W6 9NW
United Kingdom
T +44 (0)20 8600 4800
F +44 (0)20 8600 4700
mail@lds-uk.com

drawing title
basement door details
section

scale at A1	scale at A3	drawn	date
1:1/ 1:2.5	1:2/ 1:5	EM	02.06
job no.	drawing	rev.	
0382A	A4226	C	